

9287000A

ROUGH COUNTRY
 SUSPENSION SYSTEMS®


870BAG3

27.11
(688.7 mm)

2007 & UP 3" TOYOTA TUNDRA LEVELING KIT

Thank you for choosing Rough Country for your suspension needs.

Rough Country recommends a certified technician install this system. In addition to these instructions, professional knowledge of disassembly/reassembly procedures as well as post installation checks must be known. Attempts to install this system without this knowledge and expertise may jeopardize the integrity and/or operating safety of the vehicle.

Please read instructions before beginning installation. Check the kit hardware against the parts list on this page and the product layout on the last page. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

PRODUCT USE INFORMATION

WARNING As a general rule, the taller a vehicle is, the easier it will roll. Seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur. Generally, braking performance and capability are decreased when larger/heavier tires and wheels are used. Take this into consideration while driving. Do not add, alter, or fabricate any factory or after-market parts to increase vehicle height over the intended height of the Rough Country product purchased. Mixing component brands is not recommended.

Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered. If questions exist about the design, function, installation, and correct use of our products please call one of our customer service representatives at 800-222-7023.

This suspension system was developed using a Maximum tire size of 305/65 -18 (33" diameter) tire with factory wheels. For aftermarket wheel and tire combinations consult your tire and wheel specialist.

This kit was designed to level the front of the truck with the rear. This kit includes a strut spacer and strut spacer shim plates to "fine tune" the front with the rear. Before installation is initiated, measure the front and rear of the vehicle to determine how much lift will be needed to level the vehicle. Each shim plate represents approx 3/8" of lift and will be installed on top of the strut spacer as shown in the instruction sheet. (Maximum 2 per side). The spacer alone without shim plates will achieve approx 2 1/4" of lift, can be used without strut spacer shims if desired.

In some cases, the vehicle owner may want the rear of the vehicle lifted also. Rough Country offers an optional 1 1/2" block and u-bolt kit is also available to raise the rear if desired.

▲ NOTICE NOTICE TO DEALER AND VEHICLE OWNER

Any vehicle equipped with any Rough Country product should have a "Warning to Driver" decal installed on the inside of the windshield or on the vehicle's dash. The decal should act as a constant reminder for whoever is operating the vehicle of its unique handling characteristics.

INSTALLING DEALER - it is your responsibility to install the warning decal and forward these installation instructions on to the vehicle owner for review. These instructions should be kept in the vehicle for its service life.

KIT CONTENT:

- 2-Front Strut Spacers
- 4-Front Strut Spacer Shim Plates
- 2-Diff Spacers
- 3-Skid Plate Spacers
- 4-Bump-Stop Spacers
- 1-Kit Bag that includes:
 - 8-3/8" nut
 - 8-3/8" lock washer
 - 3-8mm x 30mm Bolt
 - 3-8mm Retaining Washer
 - 2-9/16" x 6" bolt
 - 2-9/16 Locknut
 - 2-9/16 Washer

TOOLS NEEDED:

	Hammer	Size	Grade 5	Grade 8
9/16" Wrench	3/8"	30 ft/lbs	35 ft/lbs	
13/16" Wrench	9/16"	95 ft/lbs	130 ft/lbs	
10mm Wrench	12mm Wrench			
12mm Wrench	14mm Wrench	Metric		
14mm Wrench	19mm Wrench	8mm	25ft/lbs	
19mm Wrench	22mm Wrench	10mm	42 ft/lbs.	
22mm Wrench		12mm	70 ft/lbs.	
		14mm	95 ft/lbs.	
		16mm	200ft./lbs	
		18mm	475ft./lbs	

TORQUE SPECS

FRONT INSTALLATION

1. Park the vehicle on a level surface and chock the rear wheels.
2. Measure the front / rear to determine how much lift will be needed to level the vehicle. FR _____ RR _____
3. Jack up the front of the vehicle using a floor jack. Place jack stands under the frame rails directly behind the lower control arms and lower the vehicle onto the jack stands.
4. Remove the tires and wheels.
5. Remove the sensor wire bracket as shown in **Photo 1** using a 10MM wrench. **Take care not to overextend or damage this wire.** Retain the hardware for reuse.
6. Remove the upper strut nuts as shown in **Photo 2** using a 14MM wrench. Retain hardware.



Photo 1



Photo 2

7. Remove the sway bar link from the lower control arms using a 19MM wrench. **See Photo 3.** Retain hardware.
8. Loosen , but do not remove the lower control arm bolts to allow the lower control arm to swing down using a 24MM wrench. **See Photo 4.**



Photo 3

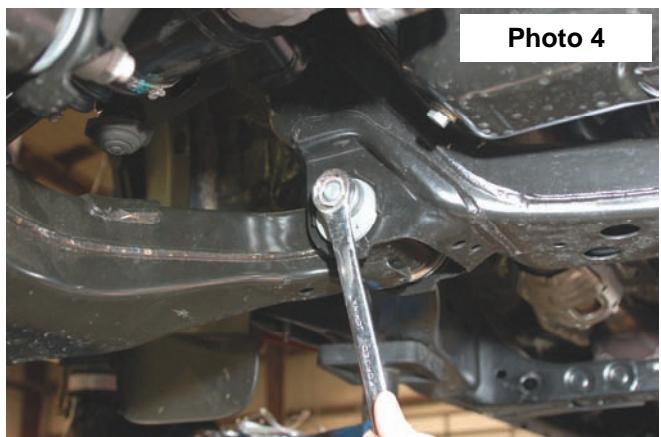


Photo 4

9. Remove the brake line bracket from the knuckle using a 12MM wrench.
10. Remove the upper ball joint nut using a 19MM wrench as shown in **Photo 5.** It may be necessary to hit side of the knuckle to break the taper lock loose.
11. Remove the lower strut bolts as shown in **Photo 6** using a 22MM socket and wrench. Remove the strut from the vehicle.

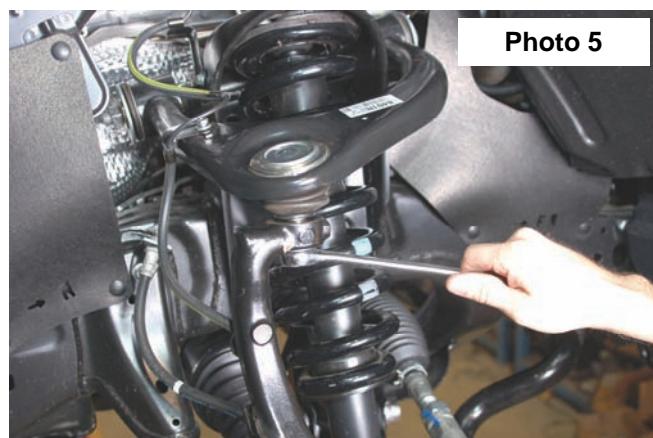




Photo 5



Photo 6


12. Install the new strut spacer on the top of the factory strut using the factory hardware making sure to position the strut spacer as shown in **Photo 7** with the flat part of the spacer toward the frame rail. Tighten hardware.

13. On this kit the front of the diff will be lowered to improve axle shaft angle. Remove the front driver as shown in **Photo 8** and passenger side differential bolts.

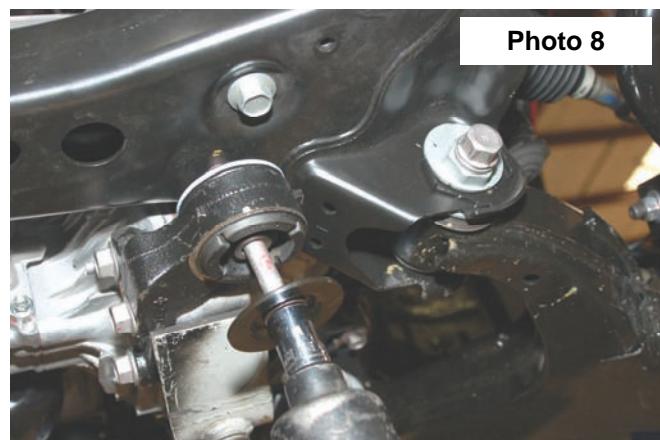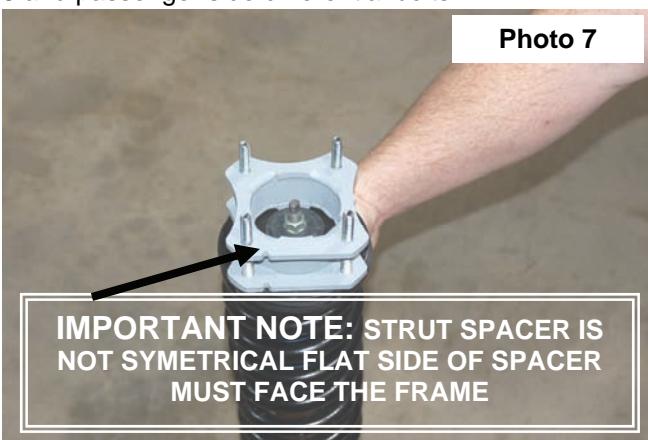


14. Install the 1" long spacers in between the diff mount and the frame with the supplied 9/16" x 6" hardware. Tighten hardware using a 13/16" wrench. **See Photo 9.**

15. Install the shim plates on the strut as shown in **Photo 10**. The shim plates are included to allow the height to be set as needed. If less lift is desired, one or both of the shim plates may be left off the strut spacer and will in turn give less lift. Each spacer shim plate will give approx 3/8" of lift. **Refer to measurement taken in Step 2.**

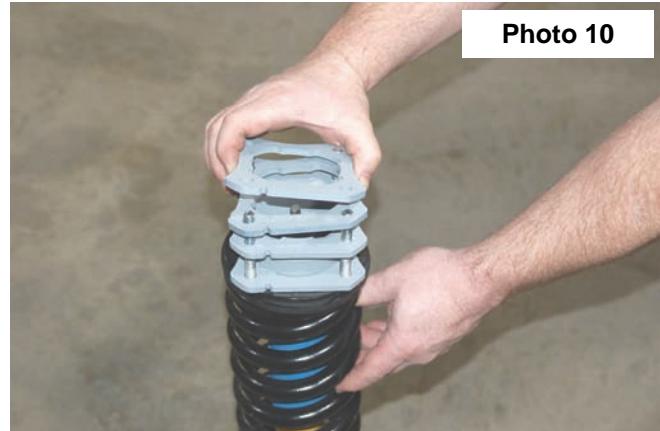


16. Install the strut in the factory mount with the supplied 3/8" nuts and lock washers on the upper mount and the factory hardware on the bottom arm. **THE STRUT SPACER IS NOT SYMETRICAL, THE FLAT ON THE SPACER MUST FACE THE FRAME ON EACH SIDE.** Using a 9/16" wrench on the upper and a 22mm socket on the lower mount tighten the hardware.

17. The skid plate spacers will be placed on the skid plate. Using the 8mm x 30mm bolts supplied in the kit, place the bolts through each hole and **secure the bolts with the retaining washers as shown in Photo 11 to keep bolt and spacer in place while installing the skid plate.** Install the skid plate into the stock holes; with the spacers between the skid plate and the frame.

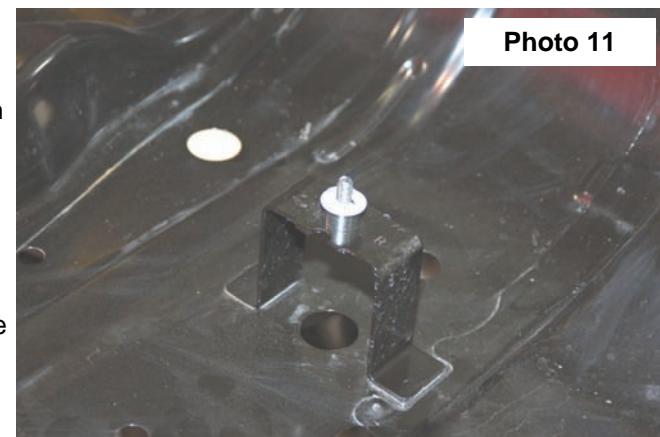

18.Remove the (4) factory bump-stops and install the supplied bump-stop spacers in the factory locations. Then install the factory bump-stops into the spacers. **See Photo 12.**

19.Tighten the bump-stops to factory specs. **See Photo 13.**

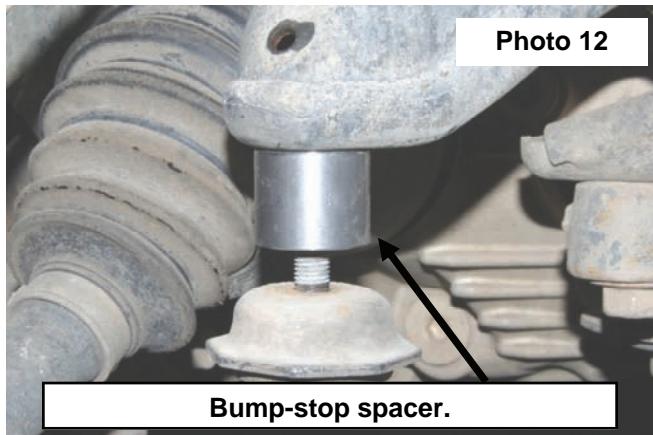

POST INSTALLATION

1. Check and recheck all fasteners for proper torque. Check to ensure there is adequate clearance between all rotating, mobile, fixed and heated members. Check clearance between upper control arm and sidewall of tire for proper clearance. Check steering for interference and proper working order. Test brake system.
2. Perform steering sweep. Cycle the steering from full turn to full turn to check for clearance. Failure to perform inspections may result in component failure.
3. Re torque all fasteners after 500 miles. Visually inspect components and re torque fasteners during routine vehicle service.
4. Adjust headlights to proper settings given increased vehicle height.

MAINTENANCE INFORMATION

It is the ultimate buyers responsibility to have all bolts/nuts checked for tightness after the first 500 miles and then every 1000 miles. Wheel alignment steering system, suspension and driveline systems must be inspected by a qualified professional mechanic at least every 3000 miles.

KIT CONTENT:

IMPORTANT NOTE:
STRUT SPACER IS NOT
SYMETRICAL FLAT SIDE
OF SPACER MUST FACE
THE FRAME

FRONT UPPER STRUT EXTENSION —2

FRONT UPPER STRUT SHIM PLATES—4

DIFFERENTIAL SPACER—2



DIFFERENTIAL SPACER FASTENERS

BUMPT-STOP SPACERS —4

SKID PLATE FASTENERS—3

Note—retaining washer
needed to hold spacer in
place during installation.

STRUT
EXTENSION
HARWARE

Thank you for purchasing a Rough Country Suspension System.

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable , State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.



