



**WARNING:** This product contains a chemical known to the State of California to cause Cancer and Reproductive Harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## 2024 LANDCRUISER HITCH RECEIVER TRIM PIECE

### PRIOR TO INSTALLATION

- A) Install the parts according to these written instructions with the hardware provided. **WARNING:** Failure to install according to these instructions will invalidate the warranty. This includes, but is not limited to, using alternative installation methods, hardware, or materials. **DO NOT USE:** Loctite, Superglue, or similar products on the hardware or the flares. *Install parts on cleaned vehicle surfaces.*
- B) **Fit:** Verify the fit of the parts to vehicle prior to installation (some filing, sanding, or cutting may be necessary to ensure proper fit).
- C) **Painting:** (Optional) if paint is desired it must be done prior to installing parts on vehicle. Clean outer surface with a good grade degreaser. **DO NOT USE LACQUER THINNER OR ENAMEL REDUCER AS A DEGREASER.** Wipe outer surface thoroughly with a tack rag prior to paint. Application of plastic adhesion promoter for TPO plastic as per your paint system manufacturer's recommendations is required. Paint parts using a high-quality enamel, or polyurethane automotive paint.
- D) **Metal Protection:** All exposed fasteners and bare metal should be treated with rust resistant paint **BEFORE** installing parts
- E) **Decals:** Parts may interfere with existing decals on vehicle. If you wish, remove decals prior to installation of parts.
- F) **Care & Cleaning:** Parts are built to last; any detergent you use to wash your vehicle is sufficient to clean the part. Do not use any harsh abrasive detergents.

### TOOLS FOR EASY INSTALLATION:

- Soft Cloth or Alcohol Wipe
- Plastic Pry Tool
- Pliers

**PLEASE READ:** Dirt and debris can become lodged between the parts and the vehicle's surface, causing scratching and paint wear from vibration. Manufacturer is not responsible for any damage, and the installation of our parts is done with the buyer's understanding that this scratching and paint wear may occur.

**LIMITED LIFETIME WARRANTY AGAINST ANY MANUFACTURING DEFECTS:** To claim warranty you must provide Proof of Purchase.

### INCLUDED IN HARDWARE KIT:

1.



Hitch Receiver Trim  
Piece  
1 pc

2.



Plastic Christmas  
Tree Fastener  
2 pcs

## SECTION 1: ROCKER SILL PLATE INSTALLATION



Open rear hatch. Use a plastic pry tool to remove two factory fasteners at underside of factory hitch cover.



Use a prying motion to pull the factory hitch cover outer piece away from vehicle, disengaging clip tabs. Discard factory hitch cover outer piece and factory fasteners.




Use a plastic pry tool to remove two factory fasteners along top area of factory hitch cover inner piece.



Use a prying motion to pull the factory hitch cover inner piece away from vehicle, disengaging clip tabs. Discard factory hitch cover inner piece and factory fasteners.



Slide a supplied Plastic Christmas Tree Fastener into both slots located on backside of Hitch Receiver Trim Piece. Press fit will be snug.

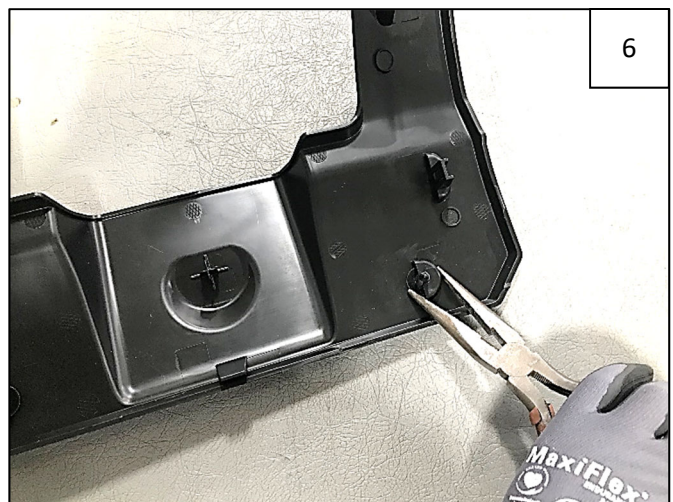

Use a plier to seat the Plastic Christmas Tree Fasteners completely into slots.



Hold Hitch Receiver Trim Piece on vehicle, aligning fastening points with molded in features in bumper.



Press firmly at top to engage Christmas Tree Fasteners.



Press each side of lower portion of Hitch Receiver Trim Piece firmly to engage molded-in Clips. Hitch Receiver Trim Piece should be snug against molded bumper features.



Installation is complete.