



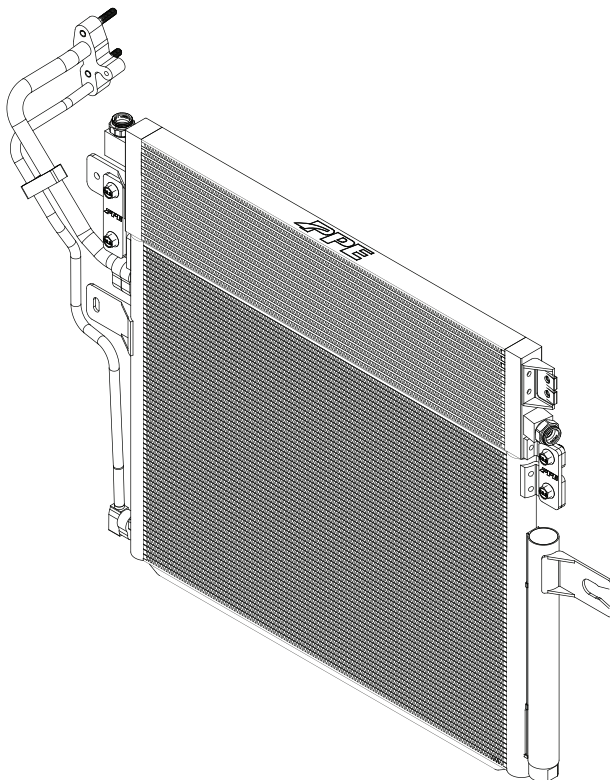

Bar and Plate Transmission Cooler and A/C Condenser Kit

2010-2012 RAM 6.7L Cummins

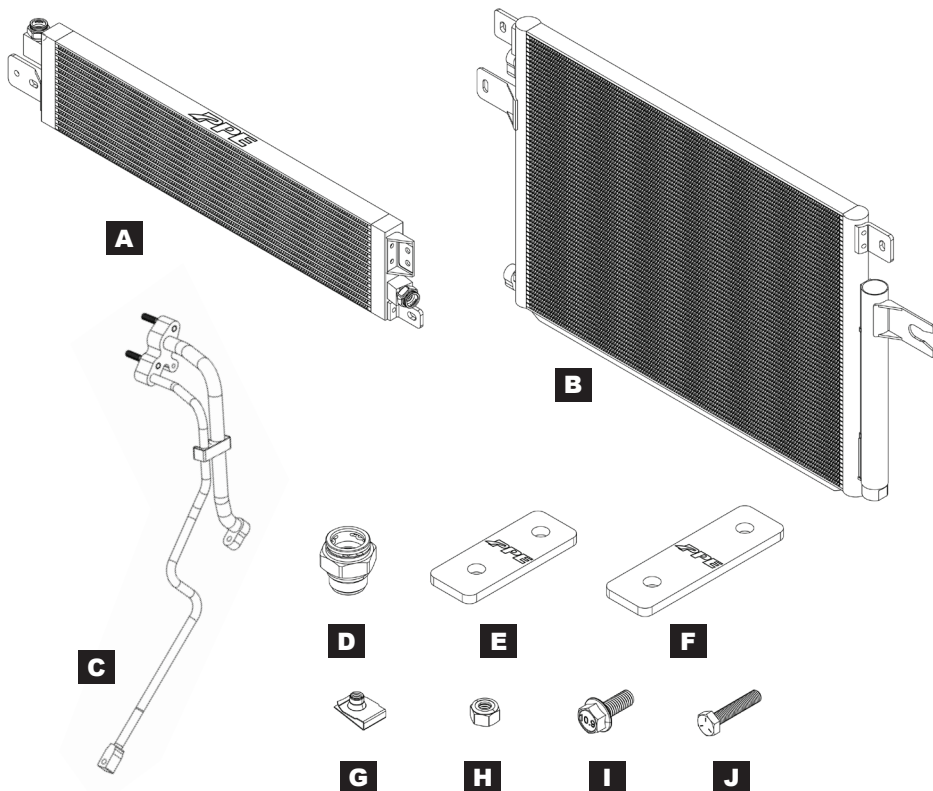

CONTENT

- | | |
|----------------------------------|------------------------------------|
| A. Transmission Cooler (1) | F. Passenger Side Bracket (1) |
| B. A/C Condenser (1) | G. Speed Clip (2) |
| C. A/C Discharge Line (1) | H. M8 Nylon Locknut (4) |
| D. Transmission Line Fitting (2) | I. M8-1.25 x 20mm Flange Bolt (4) |
| E. Driver Side Bracket (1) | J. 1/4"-28 x 1" Hex Head Screw (2) |



**PRODUCT
RESOURCES**


INSTALLATION

⚠ Warning: The air conditioning system is under high pressure. Do not loosen any hose fittings or remove any components until after the system has been discharged. Air conditioning refrigerant must be properly discharged in an EPA-approved recovery/recycling unit.


1. Ensure the vehicle is off and cool. Disconnect the negative cable from both batteries.
2. Remove the fan shroud from the vehicle. (**Fig. 1**)




3. Remove all the bolts securing the grill and pull on the bottom sides of the grill to disengage the plastic clips. (**Fig. 2 & 3**)

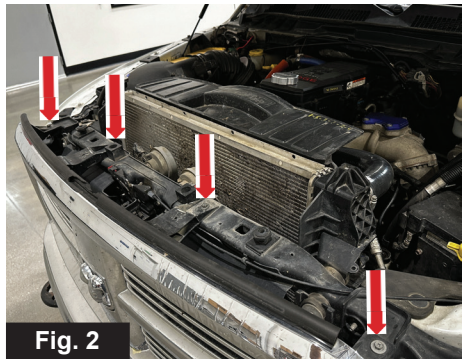


4. Remove all the plastic clips securing the hood release cable then disconnect the hood release cable from the lever. (Fig. 4 & 5)

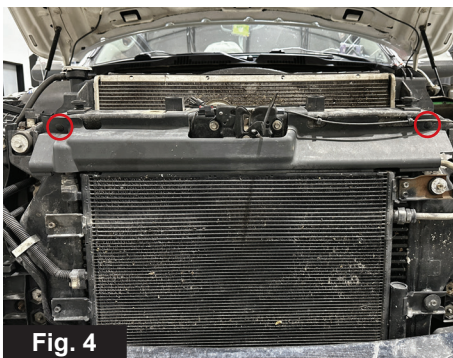

5. On the driver side, remove the two bolts securing the factory heat exchanger and transmission lines support bracket. (Fig. 6)

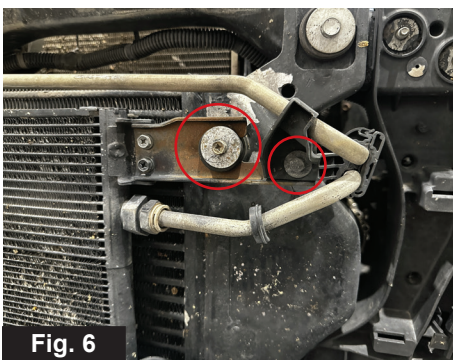

6. Disconnect both the driver side and passenger side transmission lines from the factory heat exchanger. (Fig. 7 & 8)

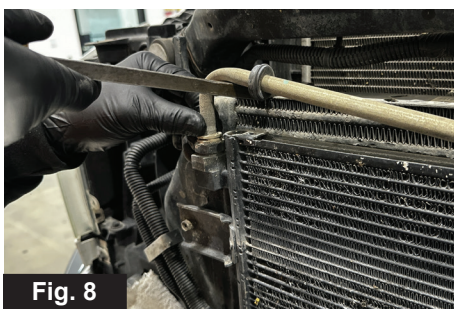

7. Disconnect the mounting nut, hose clamp, and wiring harnesses for both sensors and remove any clips attached to the air box lid. Lift the air box assembly up to disengage the prongs from the grommets and remove from the vehicle. (Fig. 9 & 10)




8. Remove the two nuts securing the factory A/C discharge line. (Fig. 11)



9. Remove the remaining mounting bolts on the heat exchanger then remove from the vehicle. (Fig. 12)



10. Check to see if the speed clips (G) are fully seated and transmission line fittings (D) are tightened. Assemble the transmission cooler (A) and A/C condenser (B) with the supplied driver and passenger side bracket (E & F) with the M8 bolt (I) and Nylon Locknut (H). (Fig. 13)

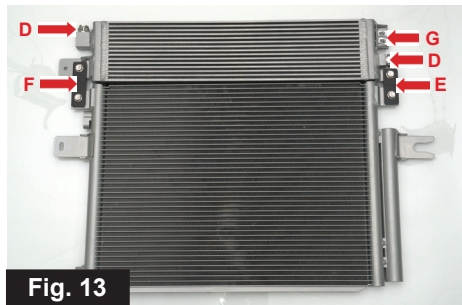

11. Install the A/C discharge line (C) into the assembly with the supplied bolt (J). (Fig. 14)



Fig. 14

12. Install the PPE heat exchanger assembly into the vehicle. Make sure that the tabs on the bottom of the PPE heat exchanger assembly are fully seated on the support bracket. (Fig. 15)



Fig. 15

13. Reconnect the A/C discharge line, all mounting bolts, and transmission lines. (Fig. 16)
14. Reinstall all factory components and trims that were removed during the installation process.

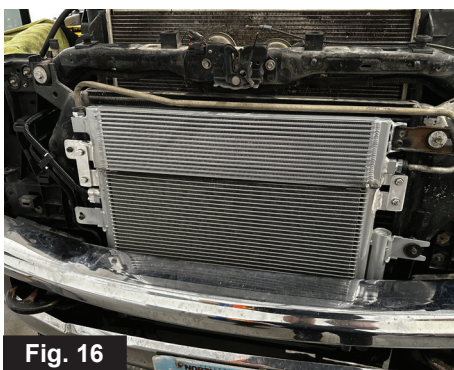


Fig. 16

Installation Complete

DISCLAIMER OF LIABILITY

Performance products can increase horsepower above and beyond factory specifications. Additional horsepower creates more stress on the drive-train components, which could result in drive-train failure.

Note regarding emissions-related, non-E.O.-legal products: THESE PRODUCTS ARE LEGAL IN CALIFORNIA ONLY FOR RACING VEHICLES THAT MAY NEVER BE USED, OR REGISTERED OR LICENSED FOR HIGHWAY OR OFF-ROAD USE.

This agreement sets forth the terms and conditions for the use of PPE products. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions. PPE (Pacific Performance Engineering) Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for the product's proper use and service. The buyer hereby waives all liability claims. The Buyer hereby acknowledges no reliance on the Seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence. The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment. The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer. The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer. The Warranty on PPE Manifolds and Up-Pipes Kits, OEM-Length Up-Pipes is three (3) years, a limited lifetime warranty on PPE cast aluminum pans and covers, and a limited lifetime warranty on PPE Transmission Coolers and one (1) year limited warranty on all other PPE products from the date of sale to original buyer and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller. Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or re-installation - of this product or any other contingent expenses. Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund. The installation of this product indicates that the buyer has read and understands this agreement and accepts its terms and conditions.

⚠ CA WARNING: Handling passenger or off-highway motor vehicle parts can expose you to chemicals such as phthalates and lead, which can cause cancer and reproductive harm. To minimize exposure, service the vehicle in a well-ventilated area, wear gloves, and wash your hands. For more information see www.P65Warnings.ca.gov/motor-vehicle-parts.

