



34935 Flyover Ct. Bakersfield, CA 93308
Phone: (661) 588-8085 | Fax: (661) 588-8295

INSTALL INSTRUCTIONS:

2019 Chevy 1500 4" Rear
Adaptive Ride Control Bracket kit
SKU: 110-70103

PARTS LIST FOR 110-70103

QTY.	PART #	DESCRIPTION
2	8637	Rear Damper Mount, 4in Lift, 2019 GMC 1500
1	HP9259	2019 REAR SHOCK BRACKET HARDWARE

PARTS LIST FOR HP9259

QTY.	PART #	DESCRIPTION
8	HARDWARE-M14-F/W	Zinc-Plated Steel Washer M14
4	HARDWARE-M14X2.0-LOCKNUT	M14-2.0 Top Lock Hex Nut
4	HARDWARE-M14X2.0X80	Metric 10.9 M14-2.0X80 Hex Head Cap Screw Partial Thread Yellow Zinc
1	2665	ARC Bracket Drill Template, 2019 GMC 1500

**WARNING**

Please read this entire instruction sheet before beginning installation. Proper installation of these components requires a qualified mechanic. Always wear safety glasses when using power tools, and take appropriate precautions when working under a vehicle. If these instructions are not properly followed you may jeopardize your, and your passenger's safety, and severe frame, suspension or tire damage may also result from improper installation.

REQUIREMENTS

- Installation requires a qualified mechanic.
- A lift is required to perform the installation of these products and always ensure the vehicle is properly supported before attempting installation or serious injury may occur.
- Read instructions carefully and study the pictures before attempting installation.
- Always wear safety glasses when using power tools.

TECHNICAL INFORMATION


- Check the parts and hardware packages against the parts list to assure that your kit is complete.
- Each lift kit, and options to lift kits, are packaged separately. Therefore, installation procedures are covered in separate instructions. Familiarize yourself with each specific set of instructions before beginning.
- Follow the OE specifications when replacing or re-installing OE fasteners, retainers, and hardware specified in the OEM manual.

INSTALLATION


1. Lower the vehicle and set the rear axle onto jack stands. Support the center driveshaft with a jack stand so that the differential does not rotate.



2. Remove the bolt attaching the damper to the axle with a 21mm socket.
3. Align the metal template to the damper mount by centering the bolt hole and aligning the upper edge of the template with the upper edge of the bracket.

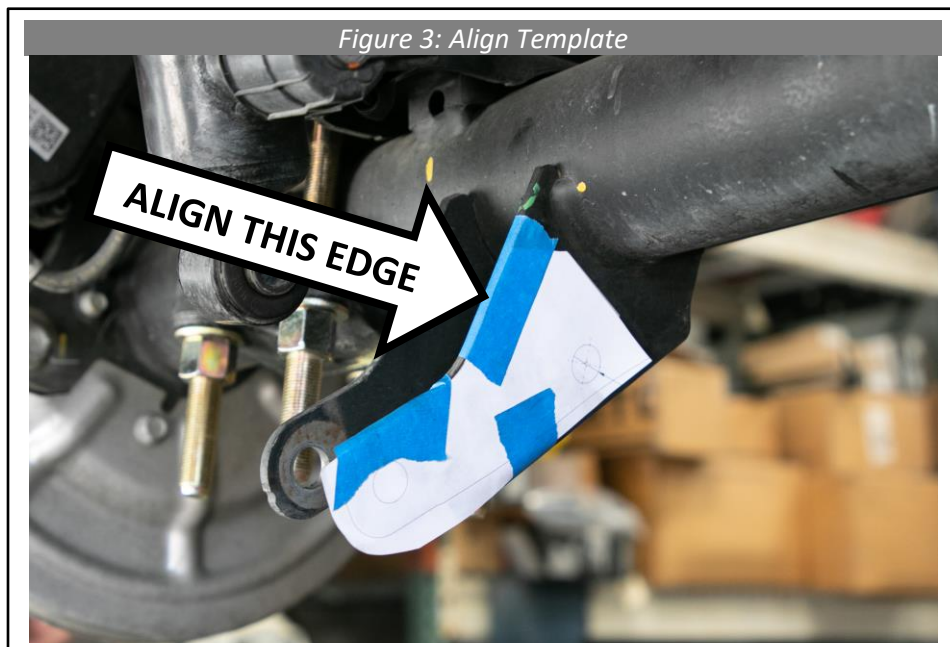

4. Using the template as a guide, center-punch the location of the hole to be drilled. Then drill all the way across both plates with a 1/8" drill bit. Repeat with a 5/16", 1/2", and 9/16" drill bit. Then deburr the hole and paint the edges of the hole if desired. Repeat other side.

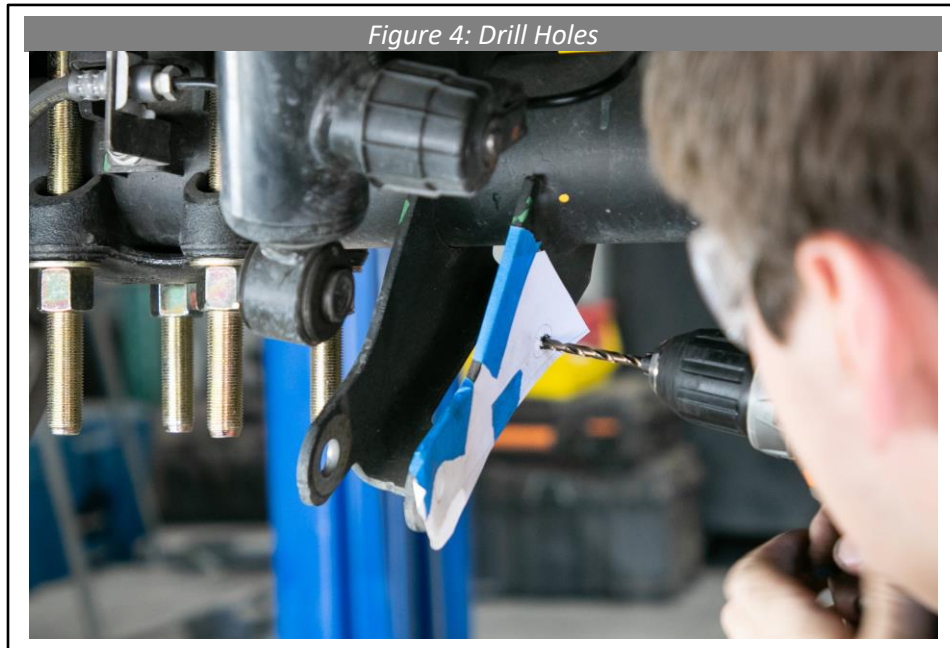

5. Install the damper bracket to the axle with the included 9/16" bolts, washers, and nuts. Tighten hardware to 105 Ft.-lbs. (143 Nm). Then install damper to bracket reusing the stock bolt and tighten to 85 Ft.-lbs. (116 Nm).

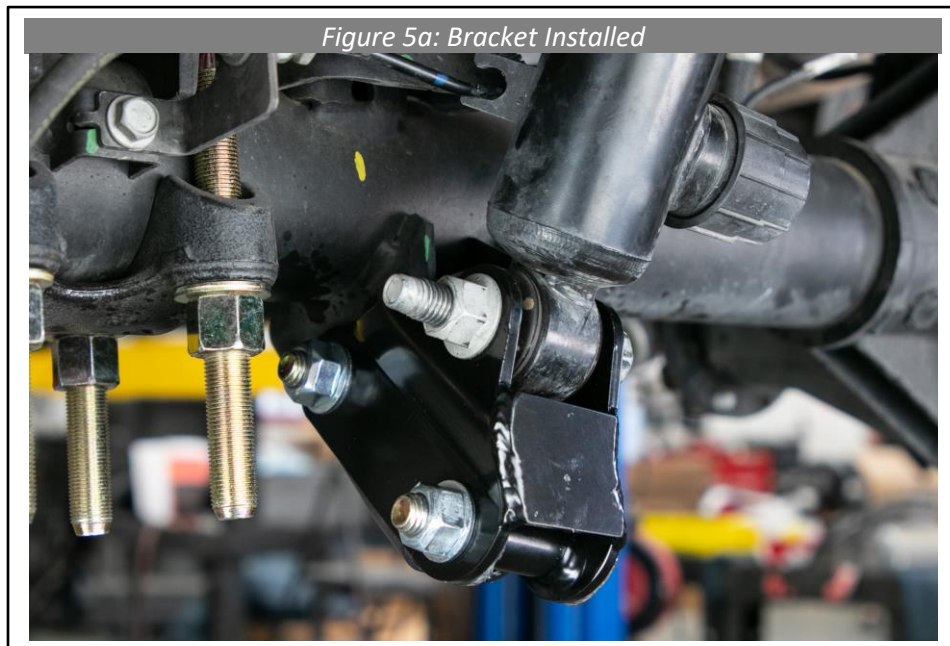


Figure 5b: Bracket Installed



WARRANTY / RETURN POLICY / SAFETY

Cognito Limited Lifetime Warranty

Cognito Motorsports, Inc. hereinafter "Cognito," warrants to the original retail purchaser, that its suspension products are free from workmanship and material defects for as long as the purchaser owns the vehicle on which the product(s) were originally installed. This warranty will be void if any modifications are made to the components, including alterations to the surface finish, i.e.; painting, powder coating, plating, and/or welding, or if they are improperly installed. Cognito truck suspension products are not designed nor intended to be installed on "competition" vehicles used in race applications, stunt or for exhibition purposes that are outside of the intended operating conditions specified by the manufacturer. Racing and competition are defined as any contests between two or more vehicles; or vehicles competing individually on off road circuits in timed events (whether or not such contests are for an award or prize).

This warranty does not include coverage for police, taxi, government or commercial vehicles, and the warranty does not cover Cognito products sold outside of the USA. Cognito's obligations under this warranty are specified and applied at its sole discretion, and warranty coverage is limited to repair or replacement of the defective product(s). Any and all costs of removal, installation or reinstallation; freight charges, incidental or consequential damages associated with the covered products are expressly excluded from this warranty.

The following items are exempt from Cognito limited warranty coverage: bushings, bump stops, tie-rod ends (Heim joints) and limiting straps. These parts are "consumables" and designed to wear as a normal part of their duty cycle, therefore they are not considered defective when worn. The aforementioned products are warranted separately against defects in workmanship, for 60 days from the date of purchase. As a condition of warranty validation, respective Cognito suspension components must be installed as a complete system (not combined with non-Cognito hardware or ancillary parts). Any substitutions or omission of required components will void the warranty. Some minor cosmetic wear and imperfections may occur to parts during shipping, which is not covered under this warranty. This limited warranty does not apply to any components that have been subjected to collision damage, negligence, alteration, abuse, or misuse, and coverage does not extend to products manufactured by third-party companies. Cognito reserves the right to supersede, discontinue, or change the design, finish, part number and/or application of its parts when deemed necessary, without notice.

Return Policy

Product returns will not be accepted without prior written approval from an authorized Cognito representative. All products being returned must be shipped via trackable, prepaid freight. Returned products are subject to a 25% percent restocking fee. The eligible return period for products purchased directly from Cognito is 30 days from the verified date when the product(s) were originally received by the purchaser.

Product Safety Advisory

The installation of Cognito steering and suspension components will modify your vehicle's original factory equipment and geometry, which may cause it to handle differently than a stock (unaltered) vehicle. Installation of these components is not intended to strengthen nor reinforce the vehicle's frame, nor are they designed to increase rollover protection. It is necessary to periodically inspect all suspension and drive train components for proper attachment, torque specifications, operation, and for any potential unusual wear or damage. Installation of these parts will modify the height of the vehicle and may raise the center of gravity. Modifying vehicle height combined with off road operation may increase your vehicle's susceptibility to rollover conditions, which may cause serious injury or death. Many states regulate allowable vehicle height modifications, and it is your responsibility to know and comply with the legal requirements specified by the laws where you reside. Modifications to your vehicle's ride height may also affect the ride quality, driver input response, trackability and handling, and wear to your vehicle's suspension components and tires.