





79-27033
aFe Power Terra Guard Bull Bar w/ Winch Mount
Subaru Outback BU Platform



Item	Description	P/N	Qty
1	Bull Bar with Winch Plate Assembly: BU Outback	05-61710	1
2	Washer, 15mm ID, 36mm OD, 6.6 mm Thk	00P-0C1774-A	4

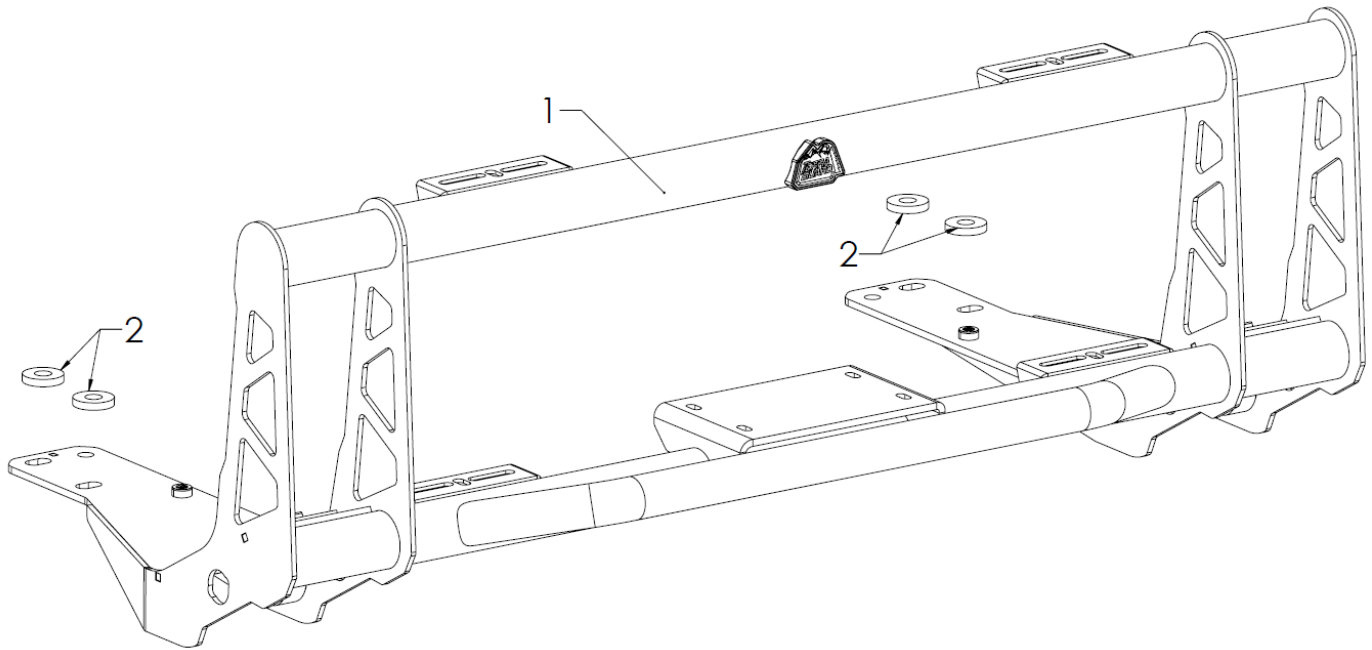

79-27038
aFe Power Terra Guard Bull Bar
Subaru Outback BU Platform

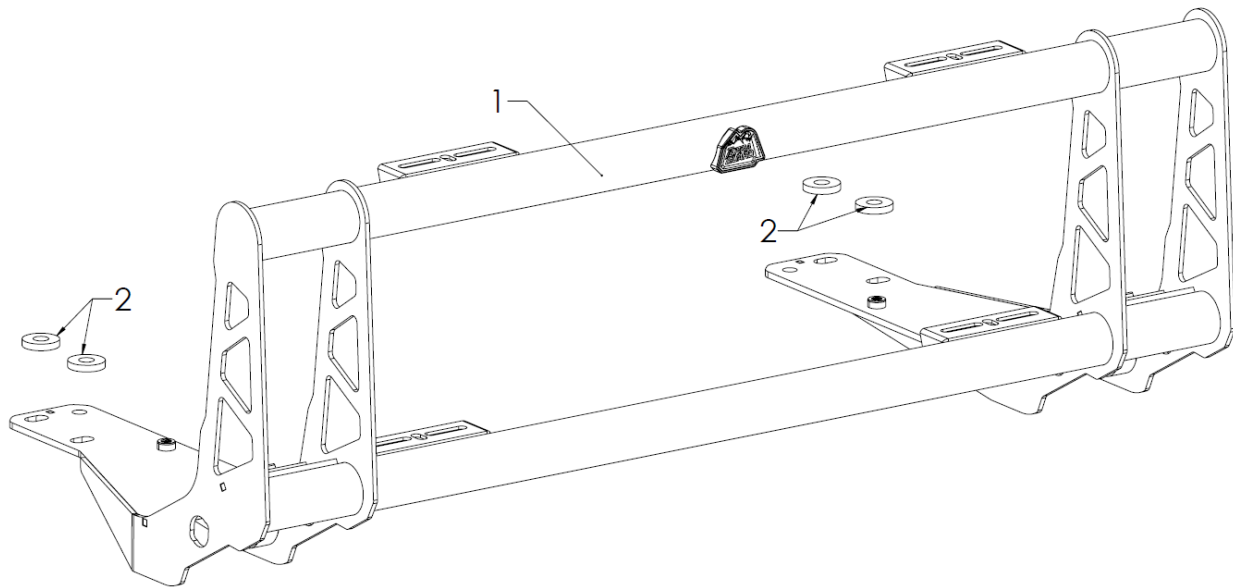

Item	Description	P/N	Qty
1	Bull Bar Assembly: BU Outback	05-61718	1
2	Washer, 15mm ID, 36mm OD, 6.6 mm Thk	00P-0C1774-A	4



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- For technical support please call 951-493-7185.
- Ensure you have all necessary tools before proceeding.
- Retain factory parts for future use.

Recommended Tools & Equipment:

- 12mm, 17mm Sockets.
- Slotted Screwdriver
- Tin Snips
- Floor ramps or 4-post lift.

Warranty Information available at <https://afepower.com/contact#warranty>


Installation Procedure


1. Prepare the Vehicle

- Position the vehicle on floor ramps or a four-post lift.




- Remove the front plastic underbody cover by removing the pop clips and two bolts that secure it to the vehicle.

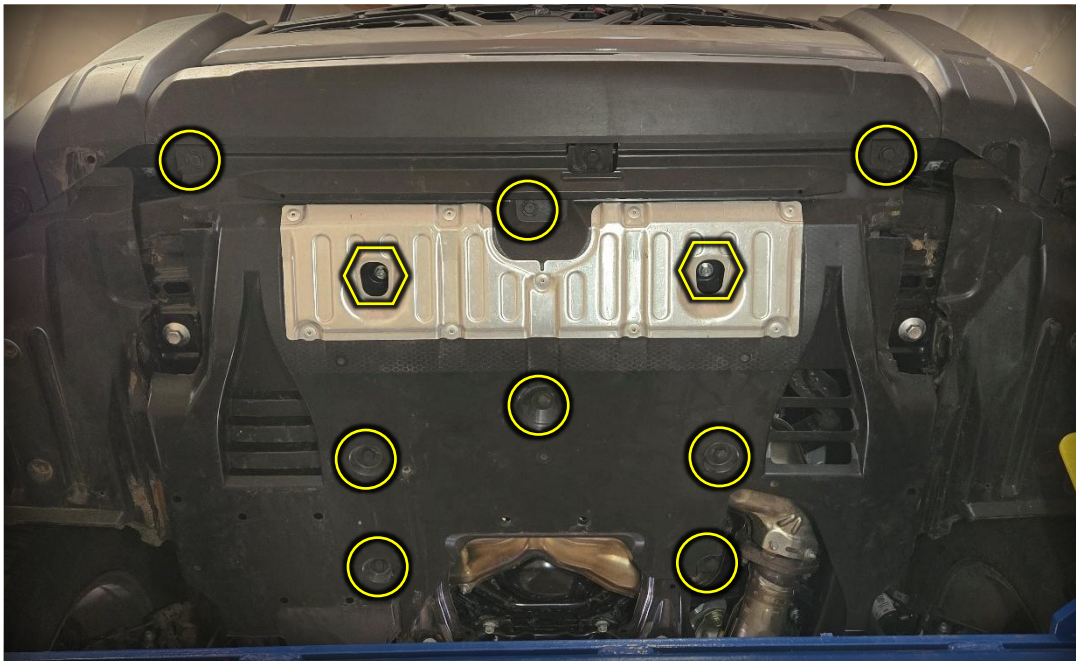

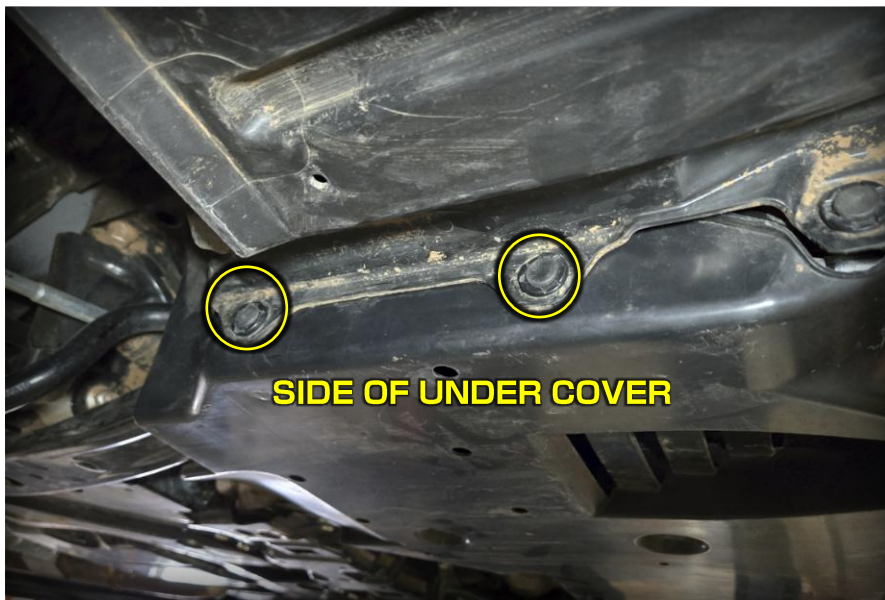

SIDE OF UNDER COVER

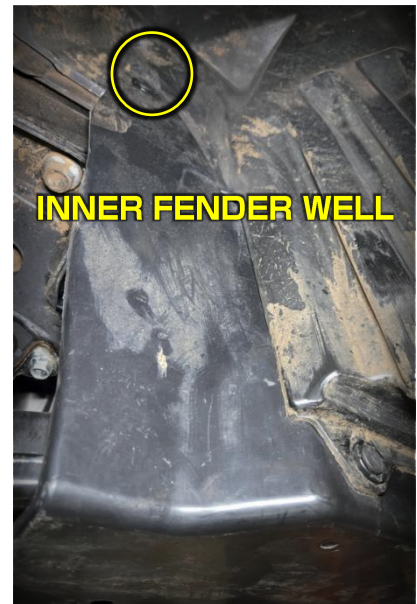

INNER FENDER WELL

2. Remove Subframe Bolts

- Locate the two subframe bolts on each side (four total).
- Remove all four bolts.






3. Mount the Bull Bar

- This step is easiest with two or three people

A. Hang the Bull Bar Using the Forward Bolt


- Lift the bull bar into position.
- Thread the forward bolt 2–3 turns—just enough to support the bull bar's weight. Do not install the spacer yet.

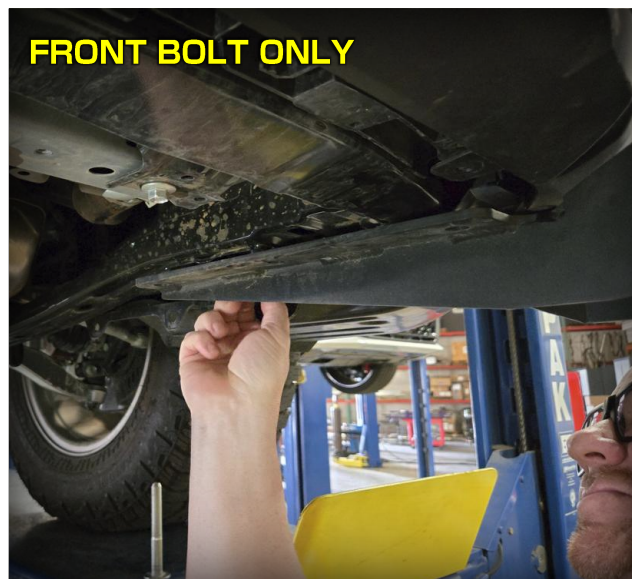




B. Install Rear Bolt + Spacer

- Insert the rearward bolt, placing the spacer between the bull bar and subframe as you do.
- Tighten by hand or with a ratchet.

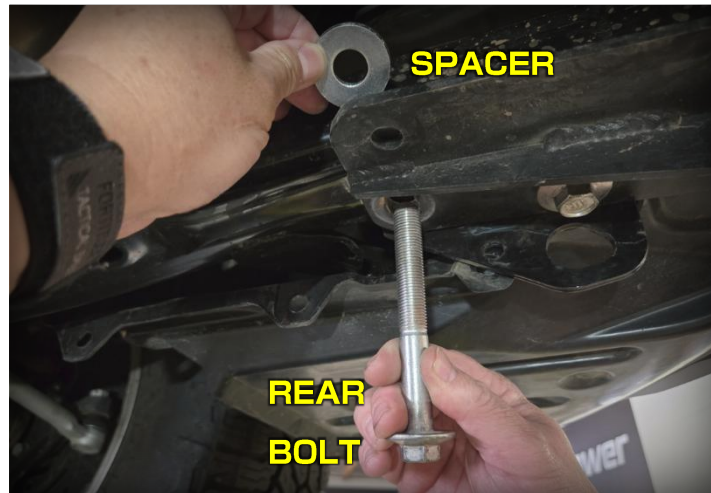

C. Install Forward Spacer

- Remove the forward bolt you previously threaded.
- Insert the spacer between the bull bar and subframe.
- Reinstall the forward bolt by hand or ratchet.

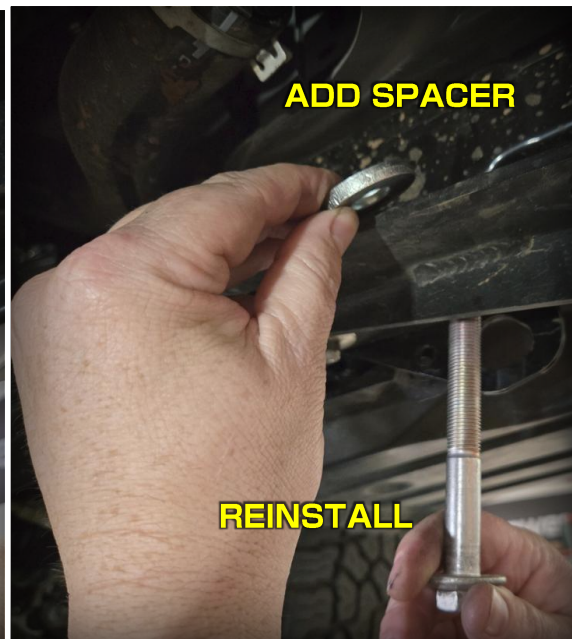

D. Final Tightening

- Once all four bolts and four spacers are installed, tighten all bolts to **100 lb·ft.**



4. Modify the Underbody Cover

Because the bull bar's mounting brackets pass through the plastic underbody cover, trimming is required.

Using tin snips, cut the front corner sections of the cover as shown below.

Reinstall the trimmed underbody cover. Your installation is now complete.





Your installation is now complete.





5. Lights and Accessories

Lighting Options


The Terra Guard Bull Bar is designed to support multiple lighting configurations.

- It includes mounting provisions for up to four light pods or a light bar on the top.
- Install your chosen lights according to the manufacturer's instructions.

Winch Compatibility (79-27033 Only)

If you are installing the 79-27033 Bull Bar with Winch Mount, the integrated winch plate supports:

- Winches up to 5500 lbs rated capacity

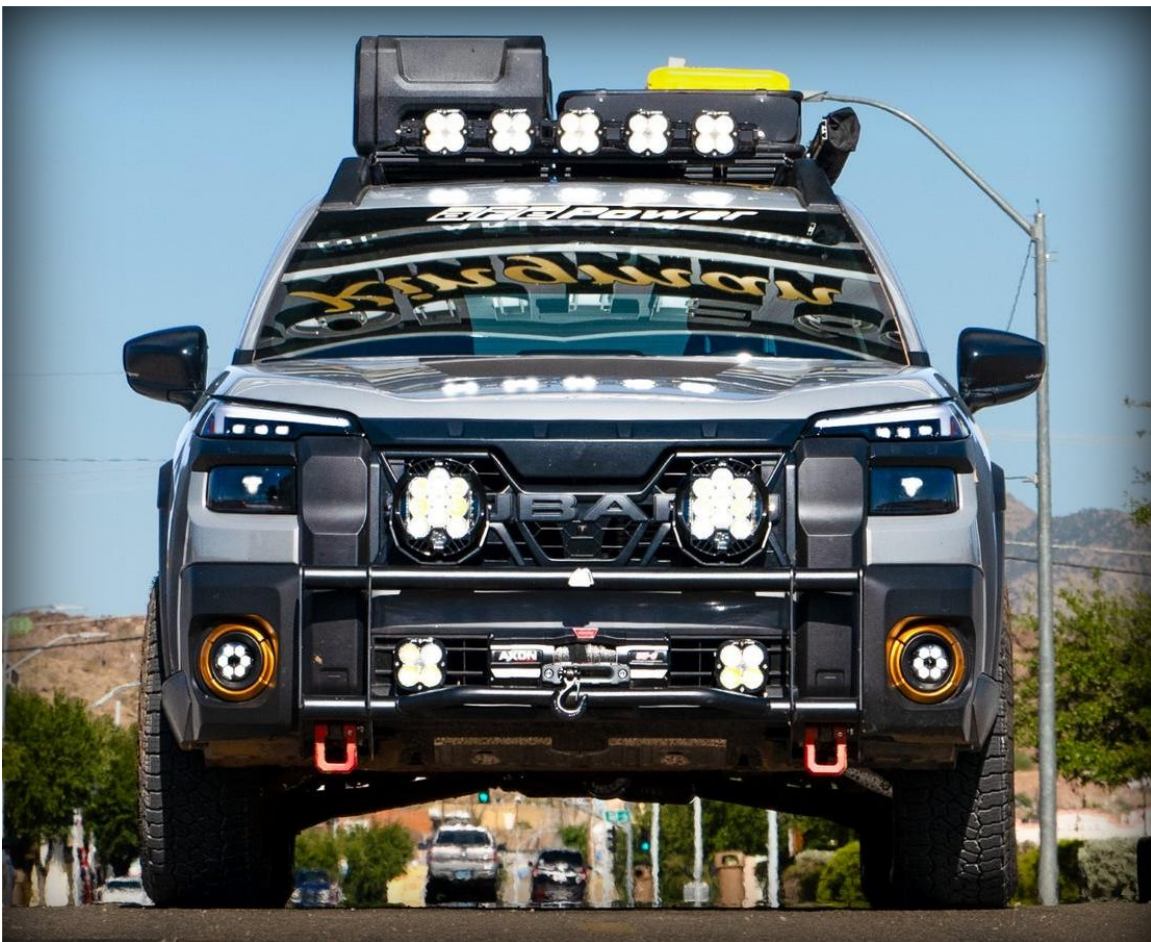



advanced FLOW engineering. inc.