


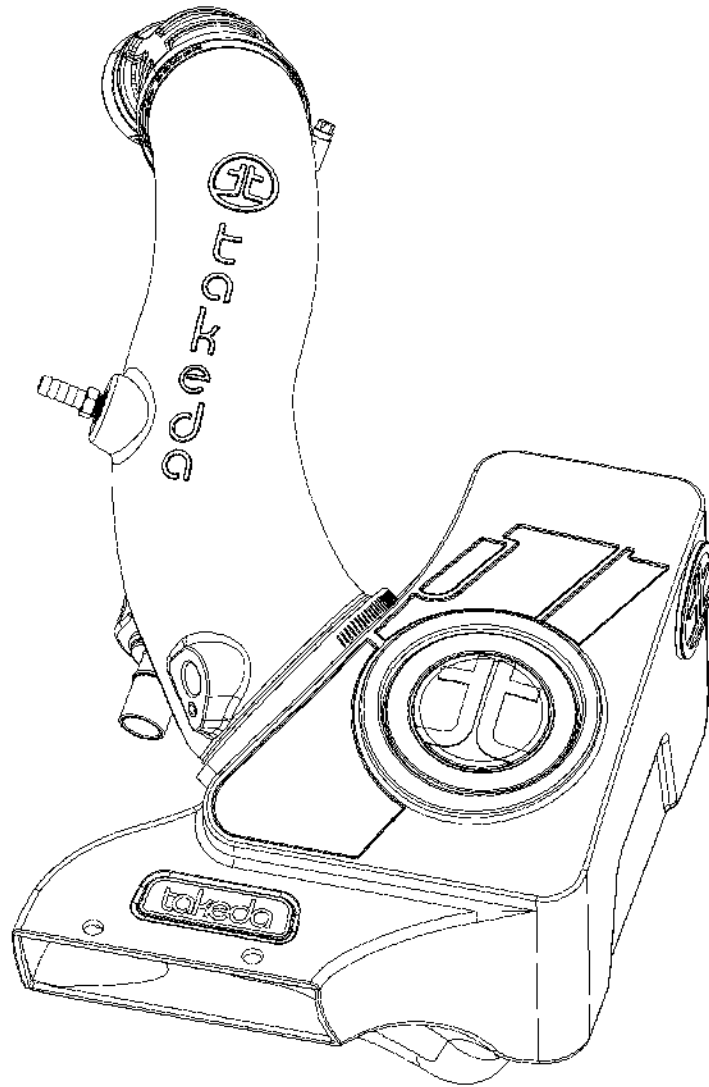

advanced FLOW engineering

Cold Air Intake System

Instruction Manual P/N: 56-70074D / 56-70074R

Make: HYUNDAI
Make: KIA

Model: ELANTRA N LINE
Model: K4 GT-LINE

Year: 2021-2026
Year: 2025-2027

Engine: L4-1.6L (t)
Engine: L4-1.6L (t)



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- If you are missing any of the components, call customer support at 951-493-7185.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Retain factory parts for future use.

Label	Qty.	Description	Part Number
A	1	Air Filter (Pro DRY S) For 56-70074D	21-91144
A	1	Air Filter (Pro 5R) For 56-70074R	24-91144
B	1	Tube	05-5670074B1
C	1	Housing	05-5670074B2
D	1	Clamp, 048 (2-9/16" – 3-1/2")	03-50007
E	1	Clamp, 032 (1-9/16" – 2-1/2")	03-50016
F	1	Grommet, Rubber	03-50139
G	1	Fitting, 3/8"ID x 1/4" NPT	03-50193
H	1	Bumper, Rubber	03-50769
J	1	Plug, Sil: 2.25" Dia x 0.16" THK (TAKEDA)	05-01527
K	1	Fitting, Recirculating, 1"	05-01823
M	1	Coupler, Silicone: 2-1/8" x 3" x 30 Deg	05-01825
N	1	Insert, Vent, Aluminum (for 2024+ vehicles)	05-01860

Installation will require the following tools:


Socket Set, Torx Set, Extensions, Ratchet wrench, Pliers, Clamp Pliers, Wrench set

Warranty Information available at: <https://afepower.com/warranty>

Fitment Note: 2024+ vehicles may experience diagnostic trouble code P04DB (Crankcase Ventilation System Disconnected) if the Aluminum Vent Insert (item N) is not installed.

Make sure Aluminum Vent Insert (item N) is installed before completing the installation to prevent diagnostic trouble code P04DB

Emissions Disclaimer: This product is not currently CARB exempt and is not available for purchase in California or for use on any vehicle registered with the California Department of Motor Vehicles. CARB exemption applications can take time to process, please contact us or visit our website for the latest updates on its status.

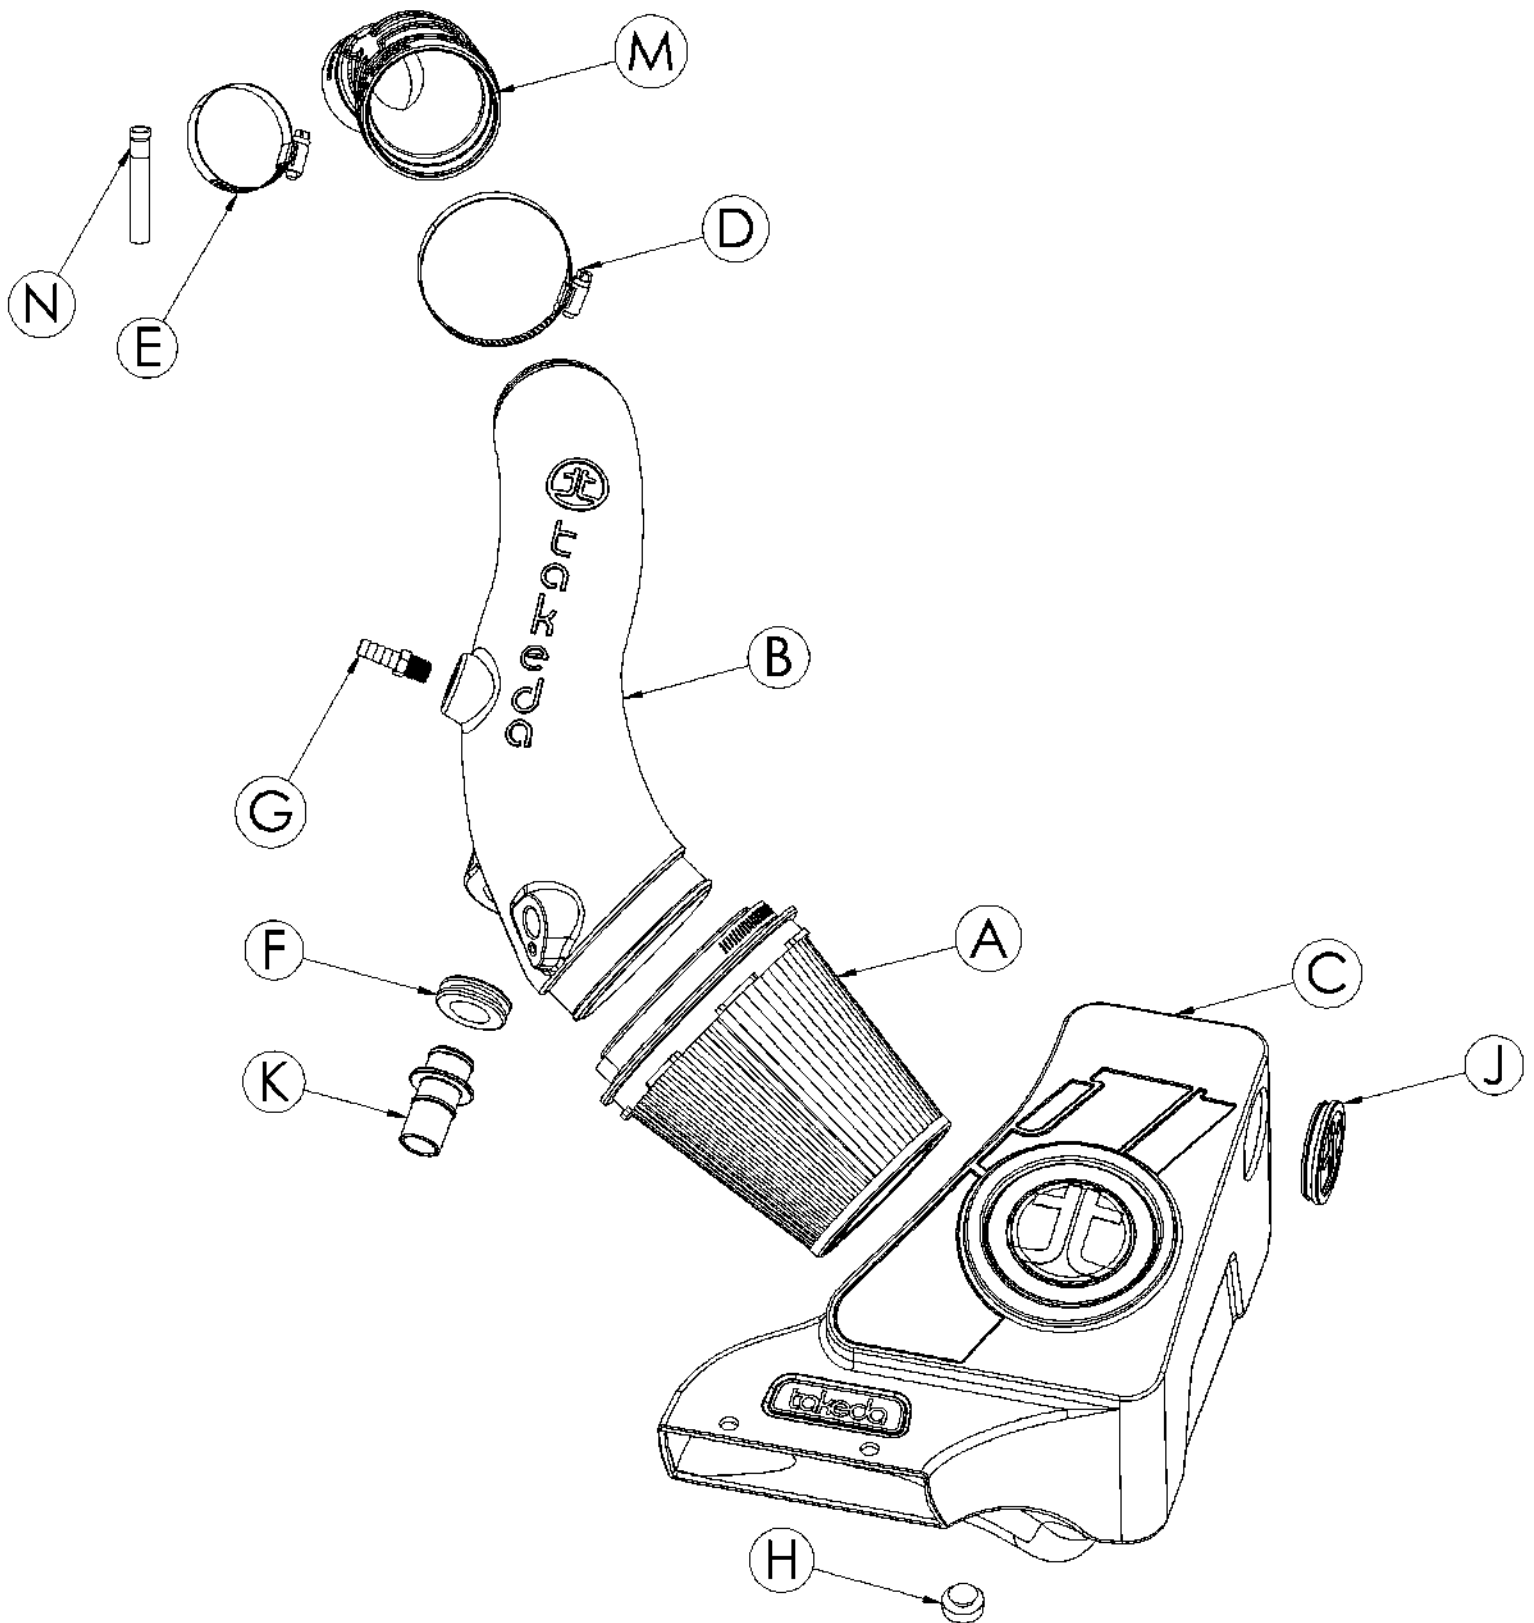




Refer to Figure A for Steps 1-2

Step 1: Remove the factory retaining clips for the scoop.

Step 2: Disconnect the sensor electrical harness from the ejector fitting.

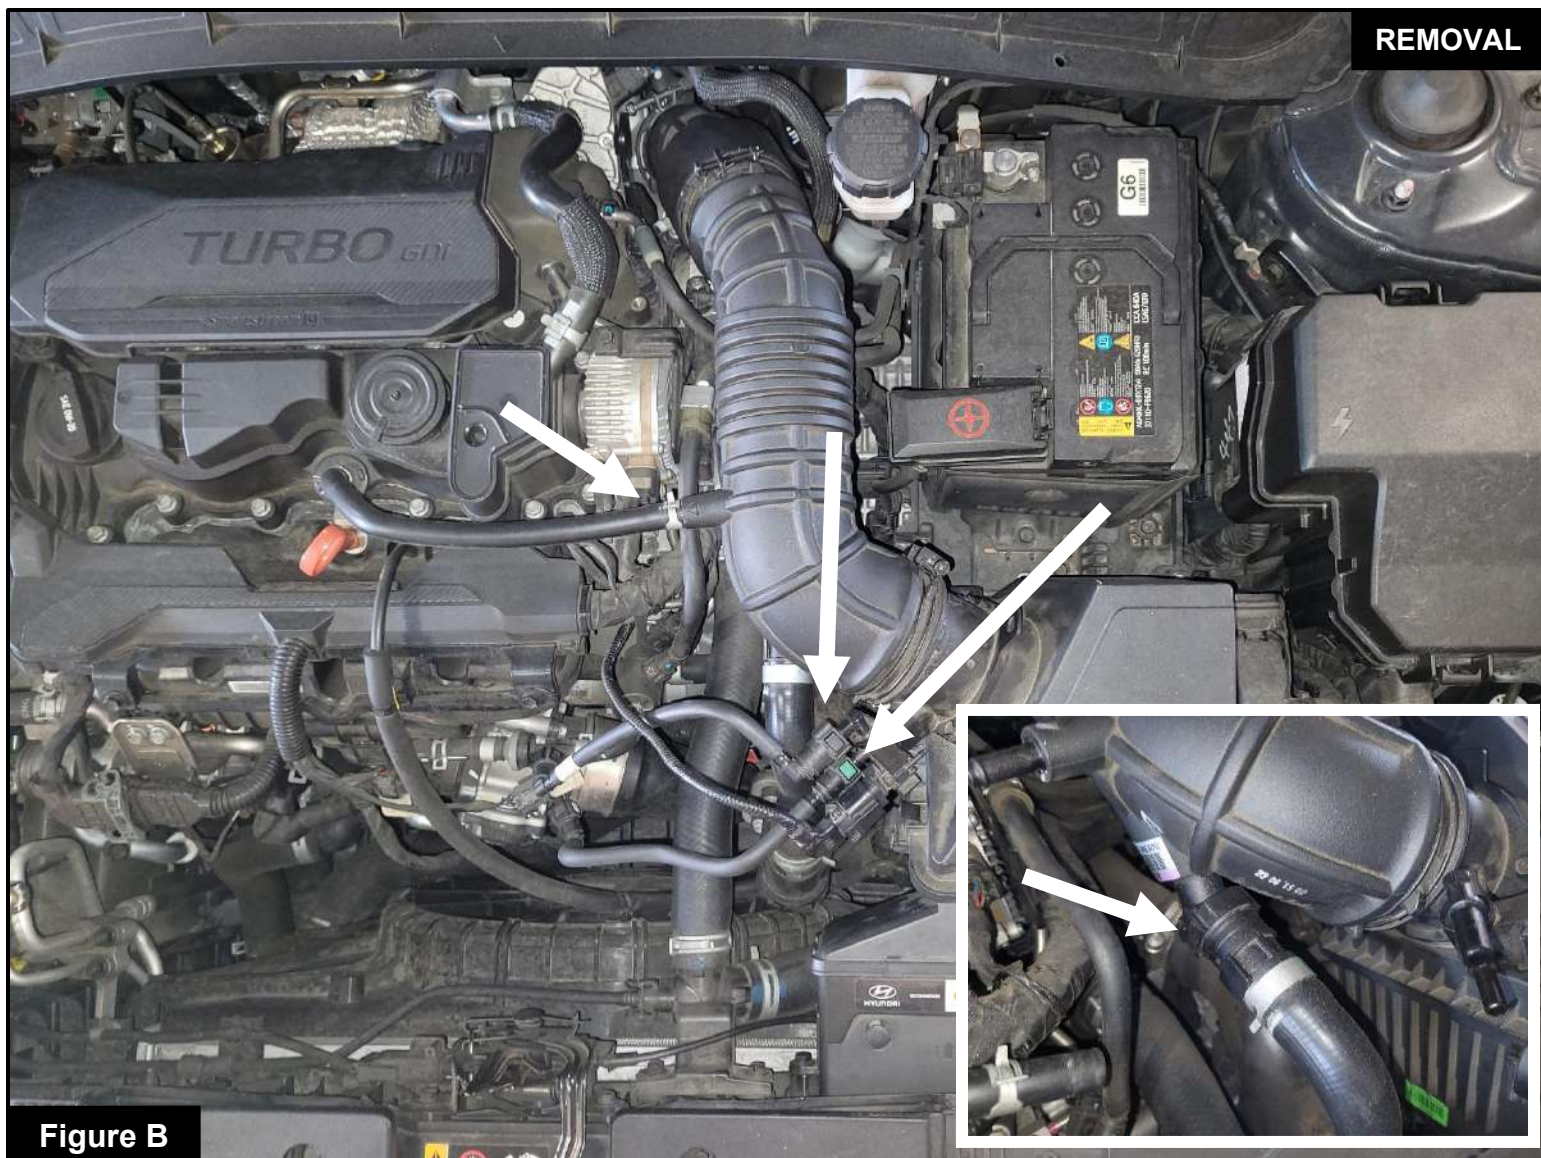


Refer to Figure B for Steps 3-5

Step 3: Disconnect both ejector fitting quick-connect hoses by pressing the side release tabs and pulling the fittings straight off.

Step 4: Disconnect the recirculation quick-disconnect hose located at the bottom of the factory intake tube by pressing the release tabs on both sides and pulling the hose straight out; you may need to reach around the intake tube with both hands for better access.

Step 5: Use pliers to disconnect the PCV hose from the factory tube.

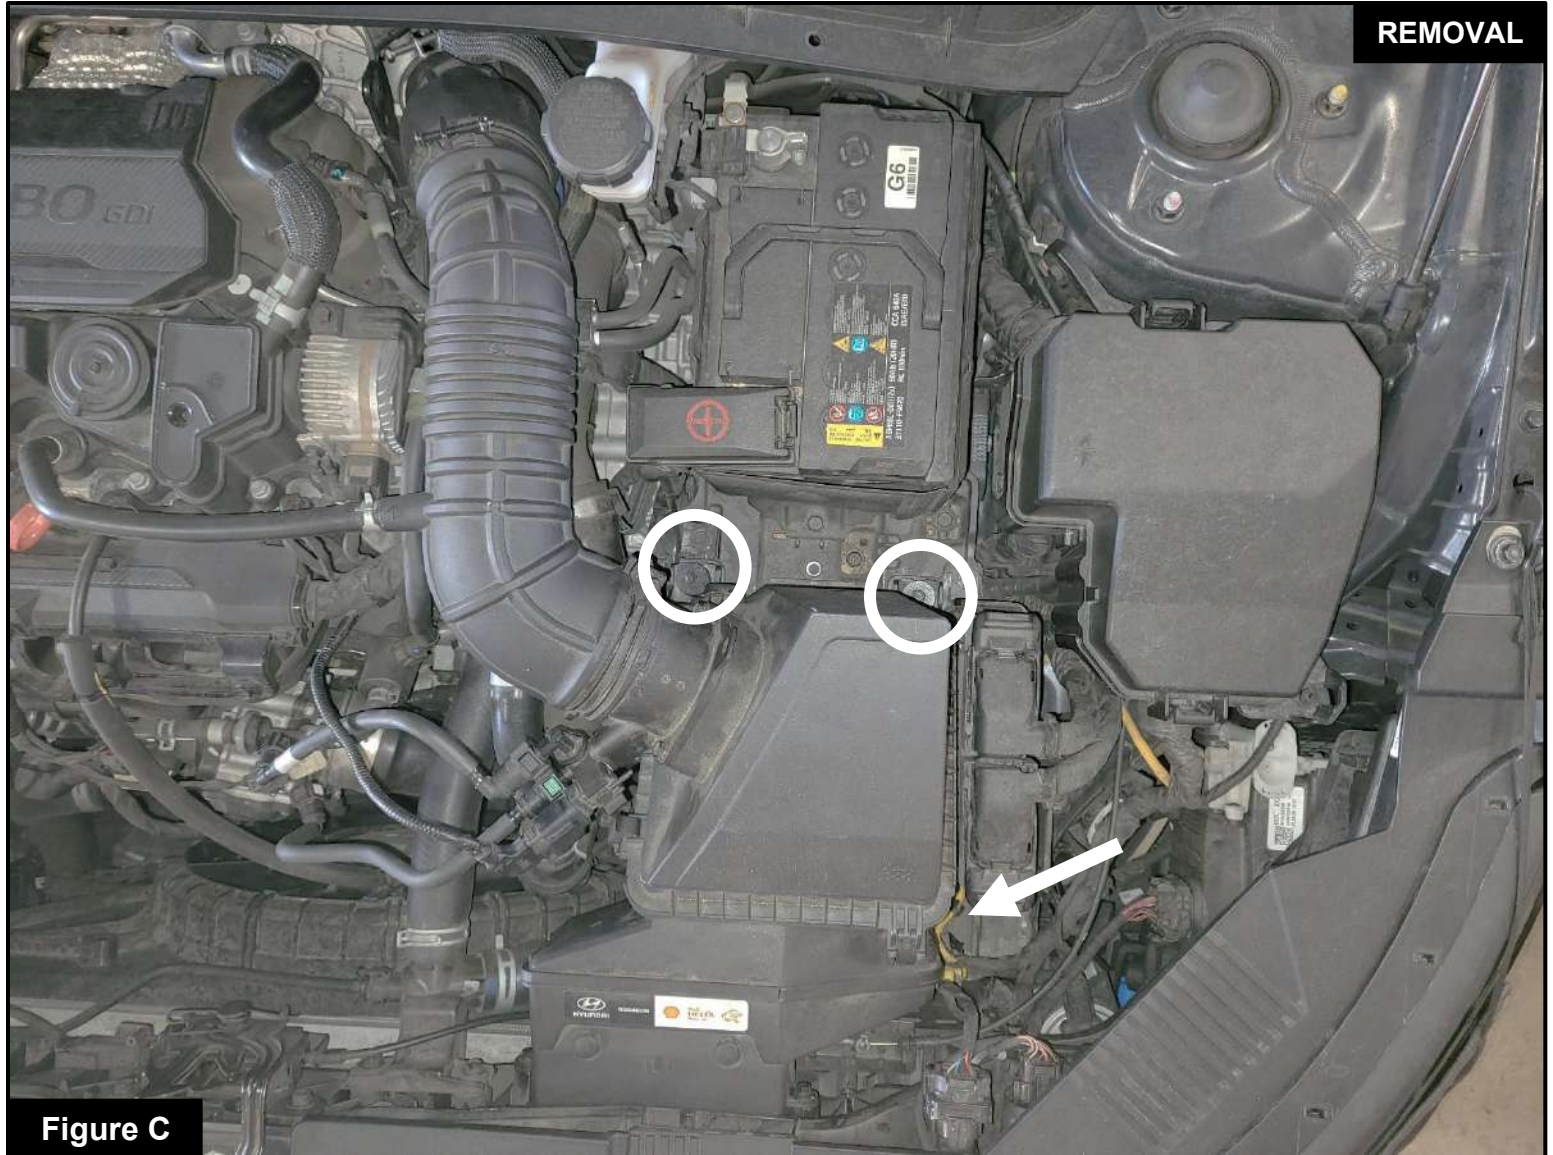

Refer to Figure C for Step 6

Step 6: Use a 10mm socket with an extension to remove the screws securing the factory air box. Screws will be reused during installation.

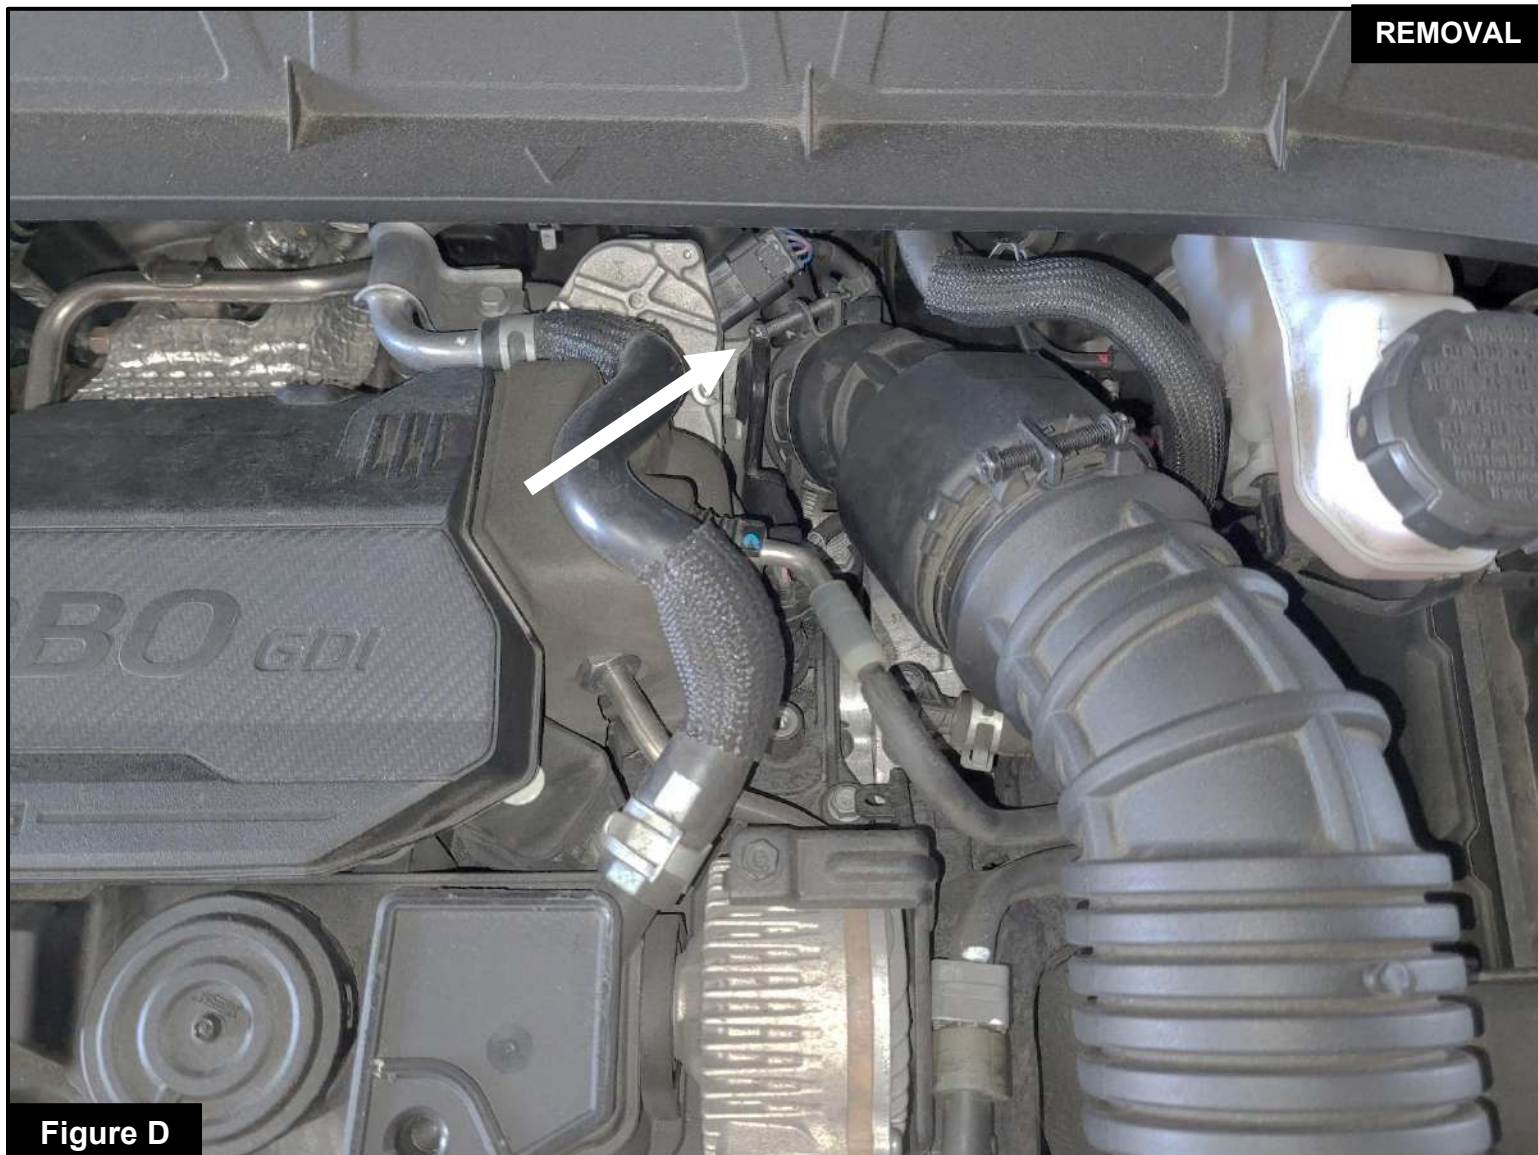


Figure D

Refer to Figure D for Steps 7-8

Step 7: Use a 10mm socket wrench to loosen the hose clamp closest to the firewall, which secures the factory intake tube to the turbo inlet.

Step 8: Remove the factory air box as a complete unit



Refer to Figure F for Steps 9-10

Step 9: Install the provided rubber bump stop to the **TAKEDA** housing.

Step 10: Transfer the rubber isolation mount and metal insert from the factory air box to the **TAKEDA** housing.


Figure G


Refer to Figure G for Steps 11-13

Step 11: Use a 10mm driver or socket wrench to remove the ejector assembly from the factory housing and transfer it onto the **TAKEDA** intake tube. Secure it using the factory screw.

At this time, inspect the O-ring to make sure it has not fallen off and is not cracked, as this could lead to installation issues or air leaks

Step 12: Use a 15mm wrench to install the provided NPT fitting into the **TAKEDA** intake tube. Tighten until resistance is felt. A small gap between the hex portion of the fitting and the intake tube is normal. Do not overtighten. Over-tightening can damage the threads.

Step 13: Install the provided rubber grommet and recirculation fitting into the **TAKEDA** intake tube with the long end of the fitting facing outward.

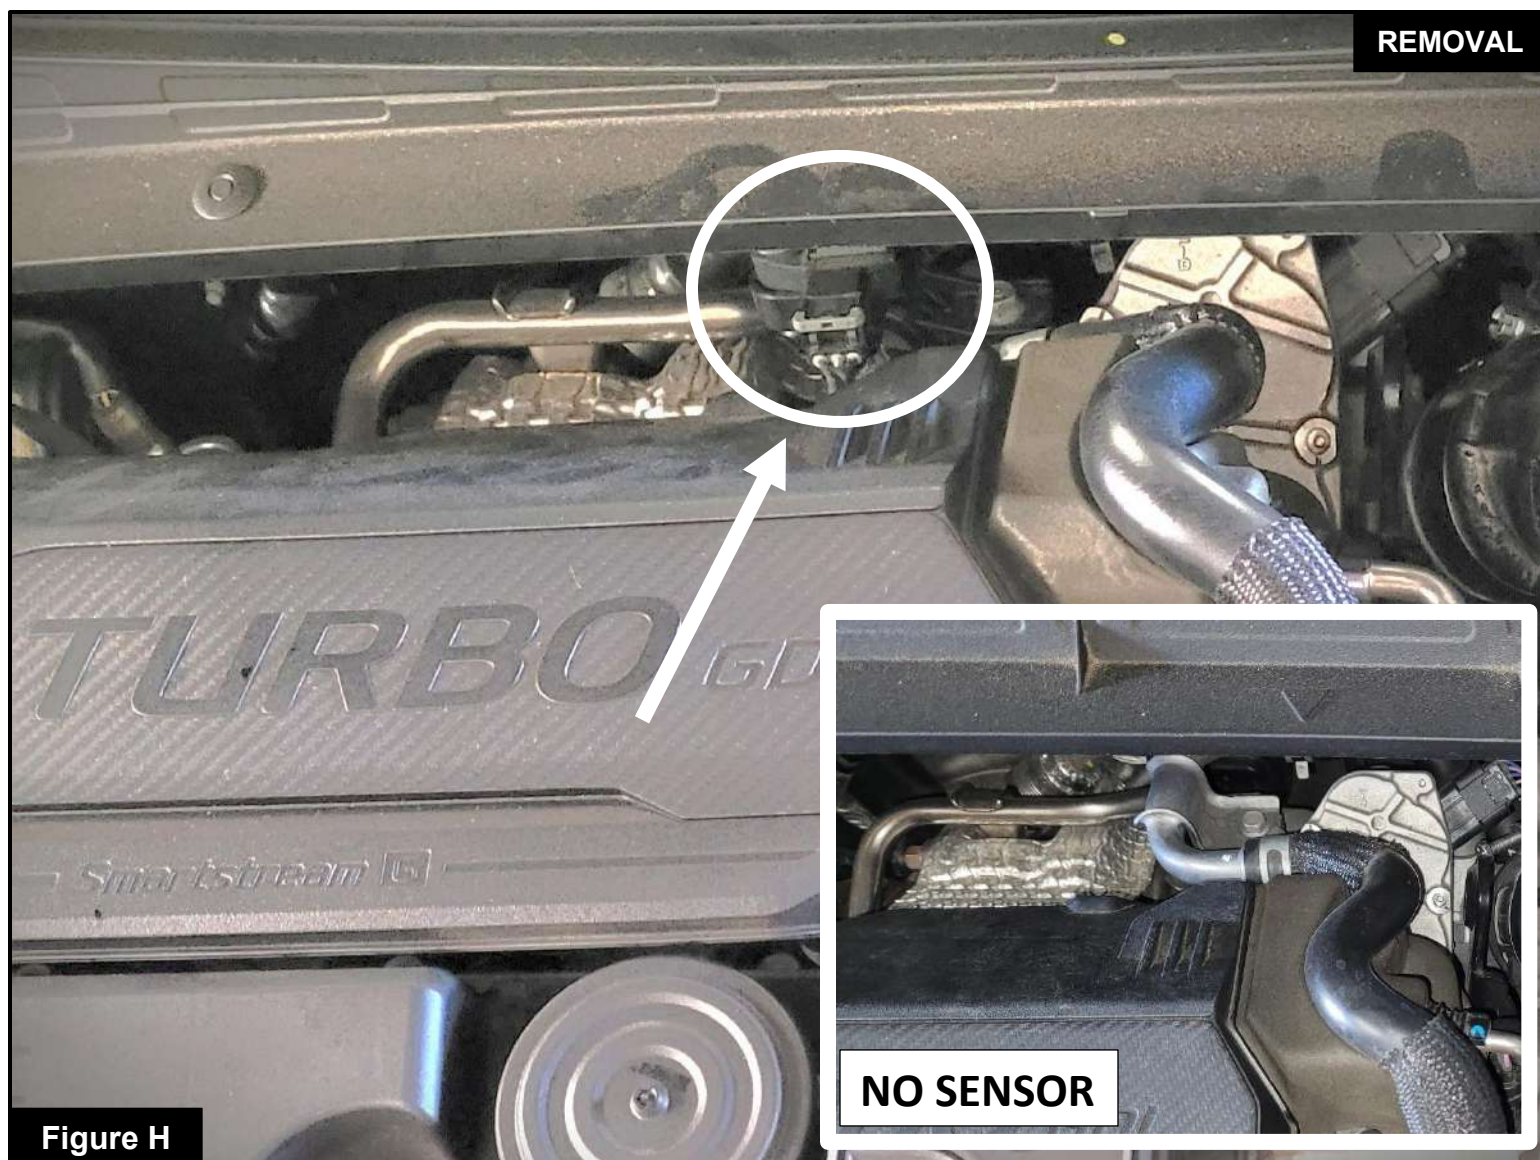

Refer to Figure H for Steps 14-15

Step 15: 2024+ vehicles are equipped with a crankcase ventilation sensor. If your vehicle does not have this sensor, skip to **Step 21**.

Step 16: If your vehicle is equipped with a crankcase ventilation sensor, continue with the following steps to help prevent diagnostic trouble code **P04DB (Crankcase Ventilation System Disconnected)** after installing the **TAKEDA Intake System**.



Figure J

Refer to Figure J for Step 16


Step 17: Carefully disconnect the electrical harness to provide enough room to access the hose behind it.



Figure K

Refer to Figure K for Step 17

Step 18: Use pliers to loosen the hose clamp and slide it upward, then disconnect the hose. Flexible spring hose clamp pliers can make this step easier.

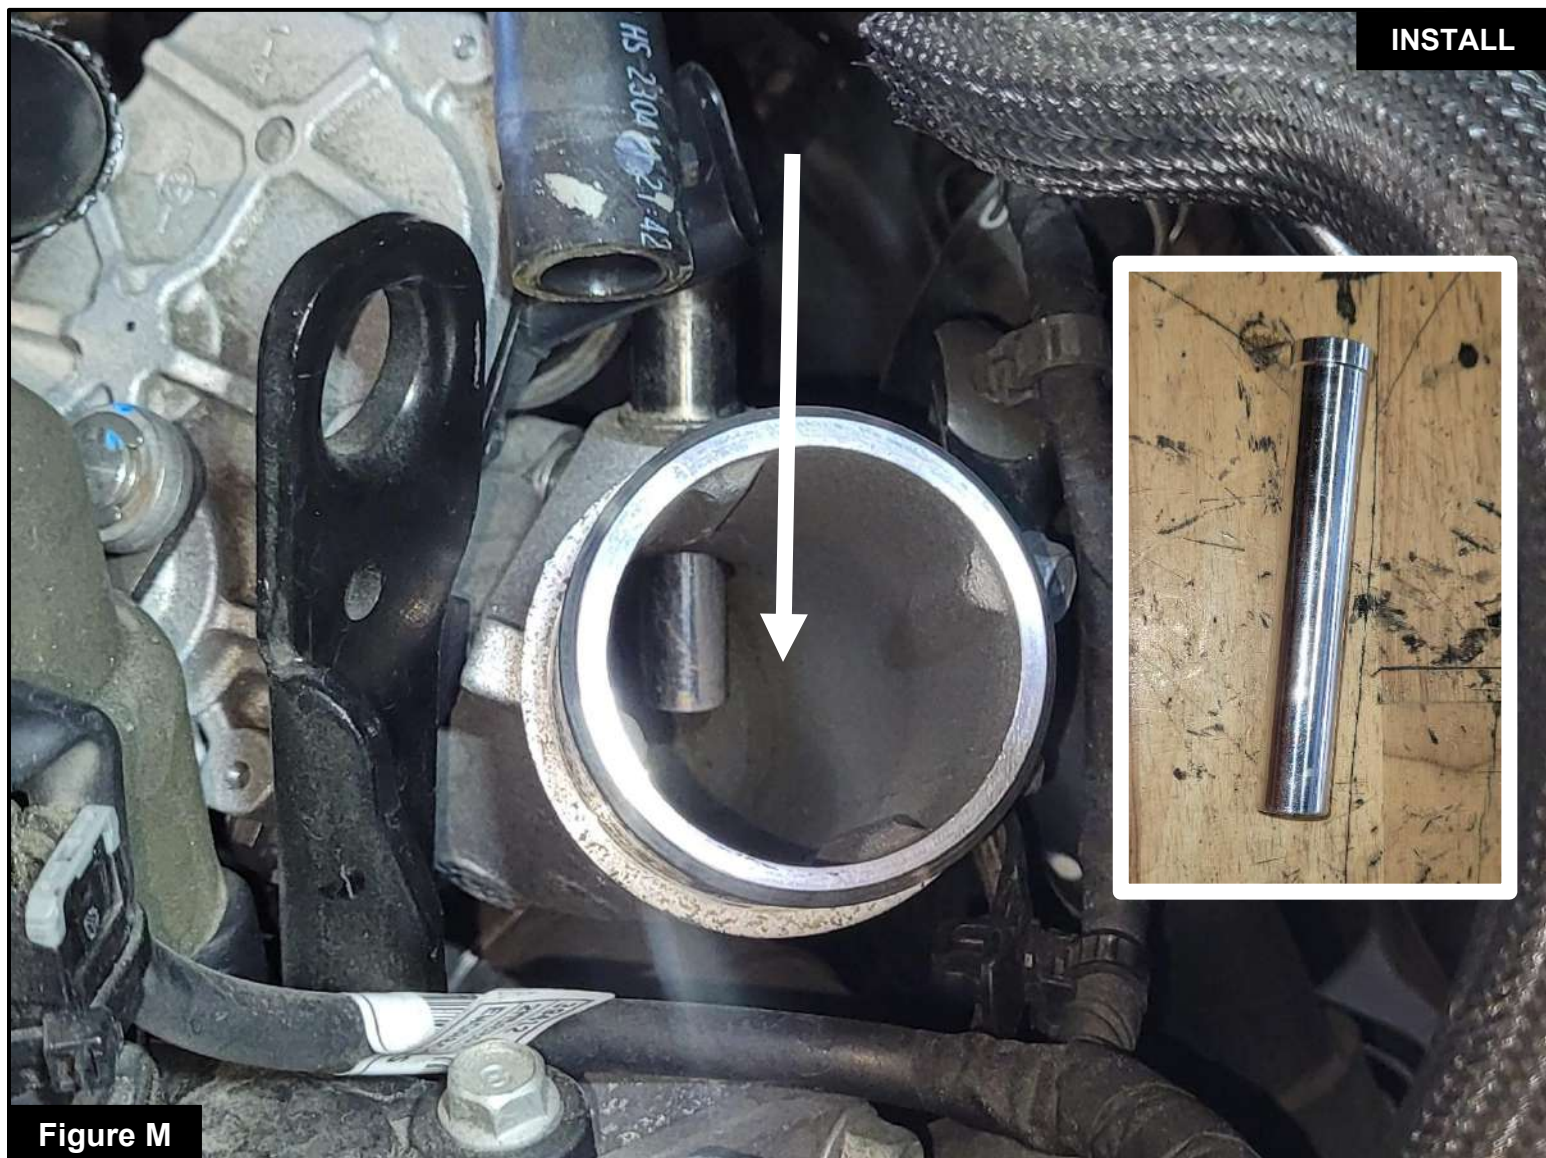

Refer to Figure M for Step 18

Step 19: Insert the provided aluminum vent insert into the fitting. Do not force it in; the insert should slide in freely to a fixed depth.

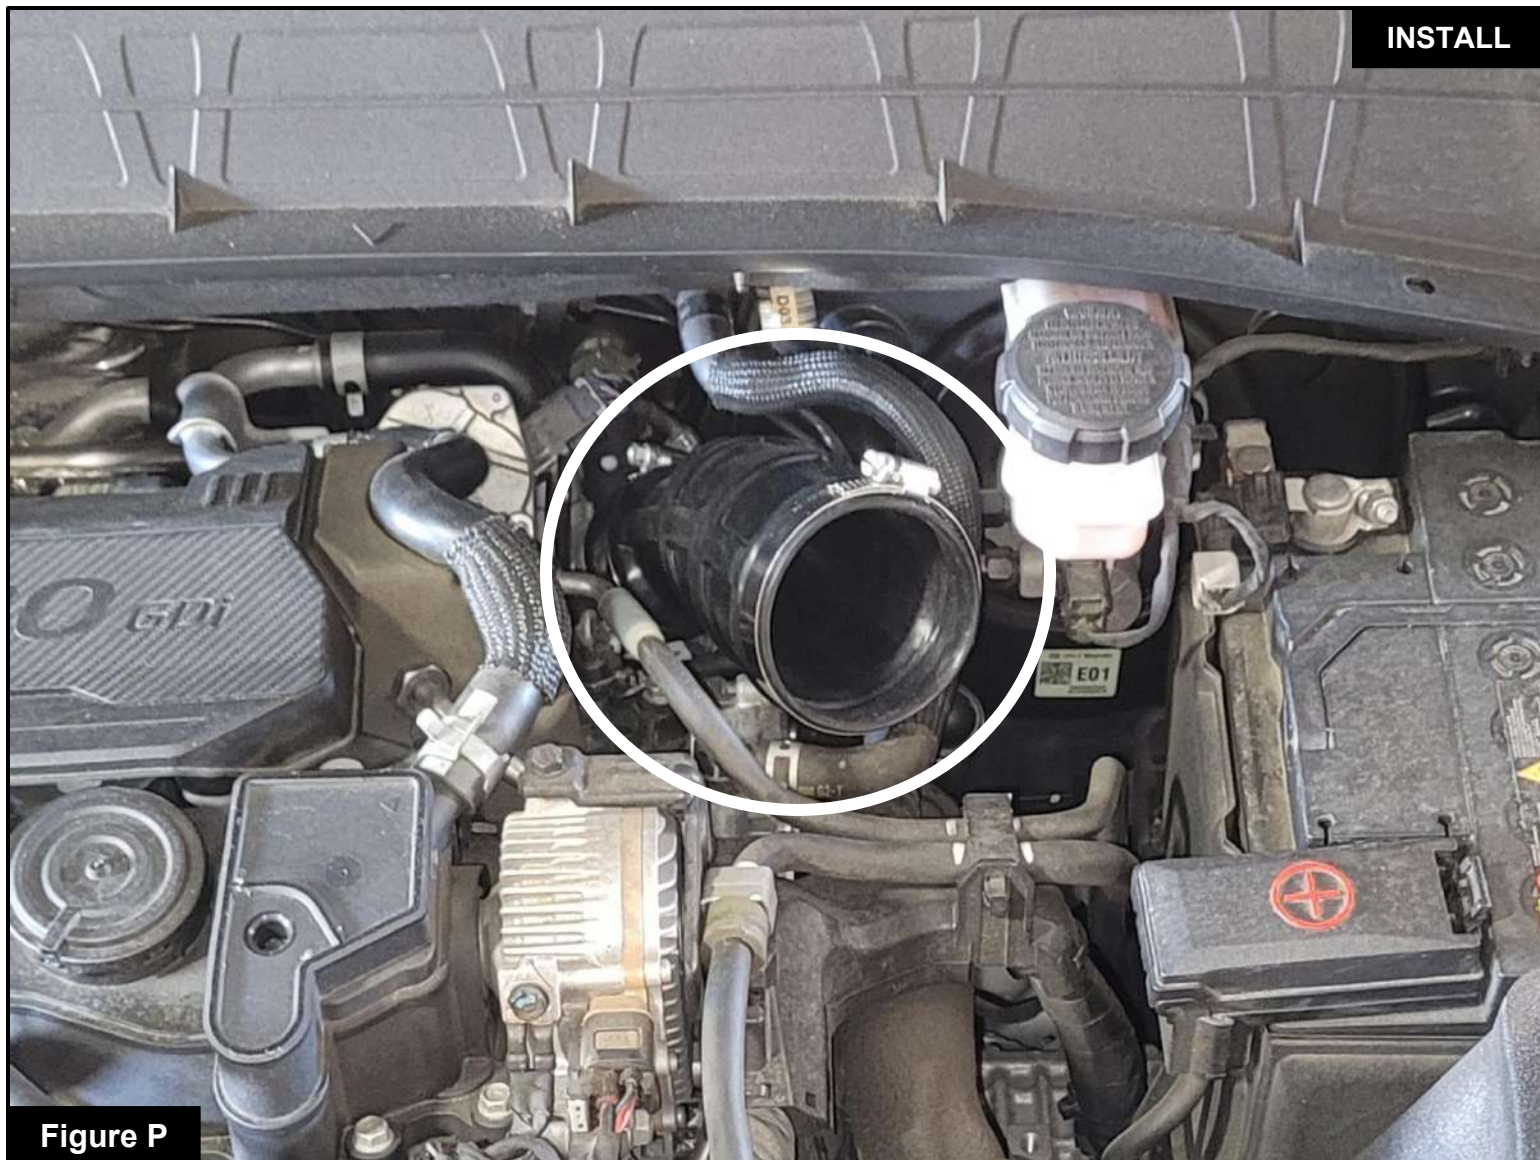


Figure N

Refer to Figure N for Steps 19-20

Step 20: Slide the hose removed in **Step 15** back onto the fitting and aluminum vent insert. Secure it with the hose clamp.

Step 21: Connect the electrical harness.


Figure P

Refer to Figure P for Steps 21-23

Step 22: Install the **#032** clamp over the small end of the **aFe POWER** coupler. Do not tighten at this time.

Step 23: Install the small end of the coupler onto the turbo inlet and orient the coupler and clamp as shown.

Do not tighten clamp at this time.

Step 24: Install the **#48** clamp onto the large end of the coupler and orient it as shown. Do not tighten it at this time.

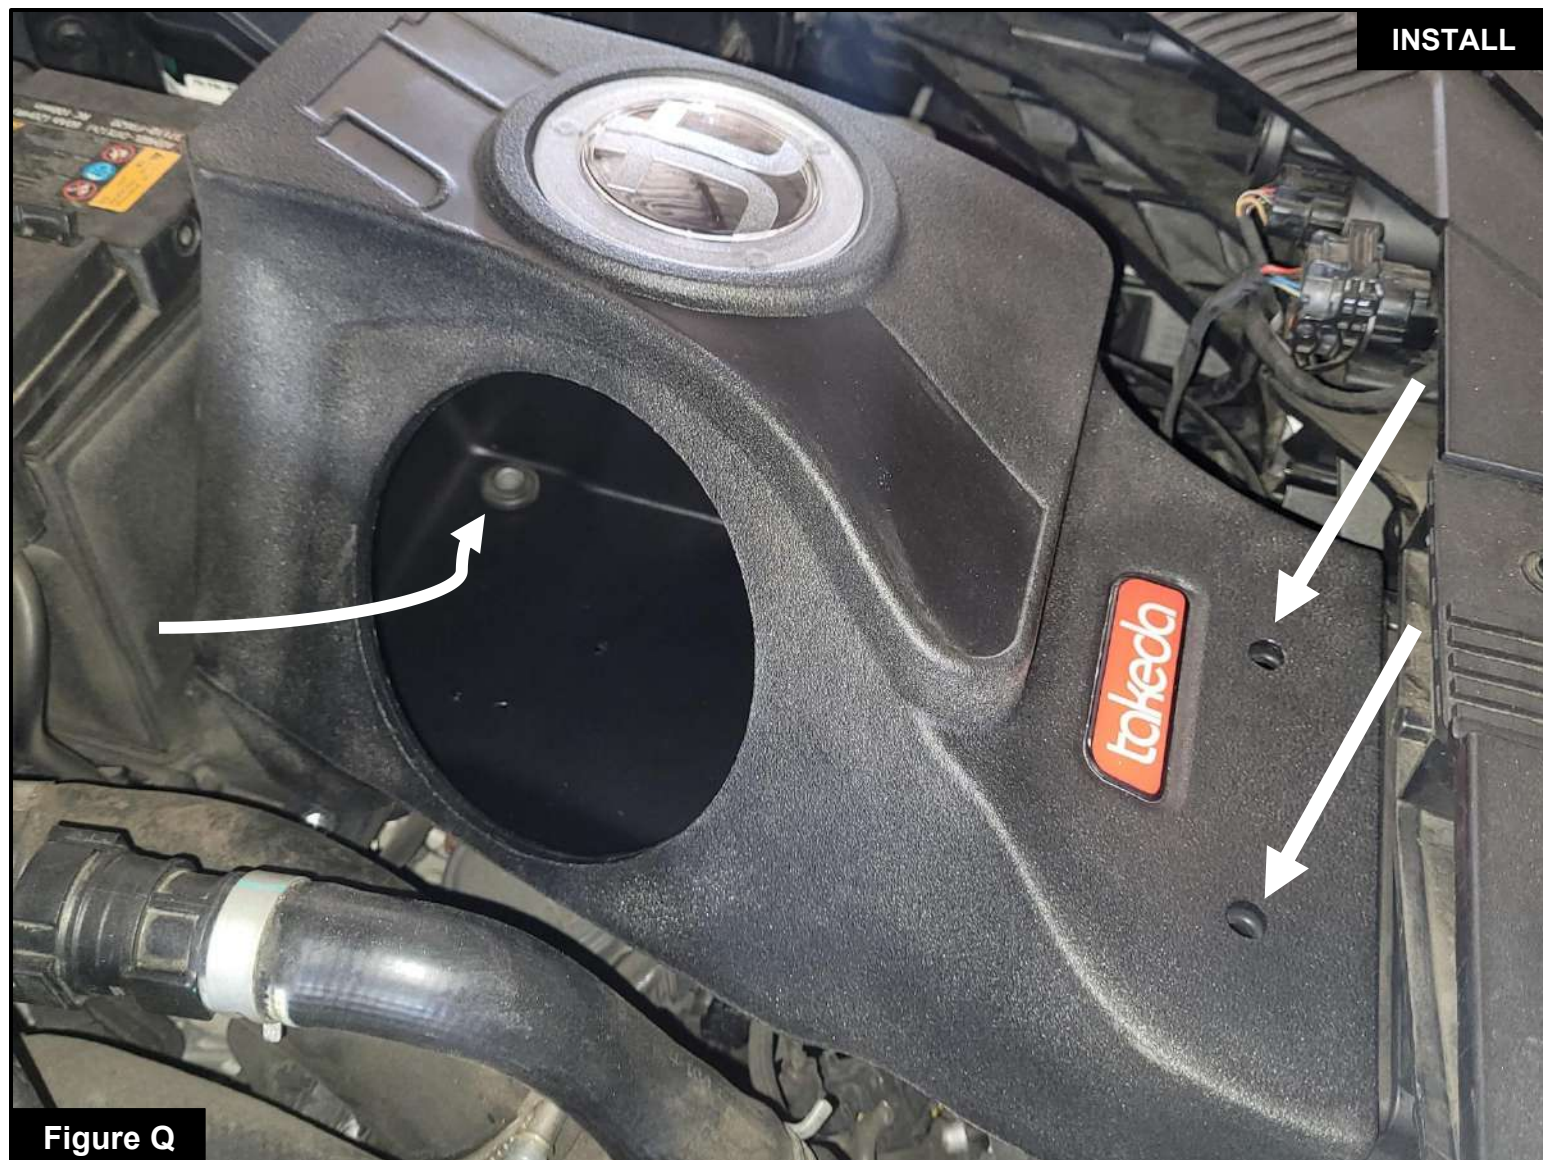



Figure Q

Refer to Figure Q for Steps 24-26

Step 25: Install the **TAKEDA** housing into the vehicle, making sure the mounting holes line up.

Step 26: Use one of the 10mm screws removed in **Step 6** to secure the **TAKEDA** housing. The screw installs from inside the **TAKEDA** housing.

Step 27: Install factory retaining clips, that were removed in **Step 1**, into housing mounting holes.

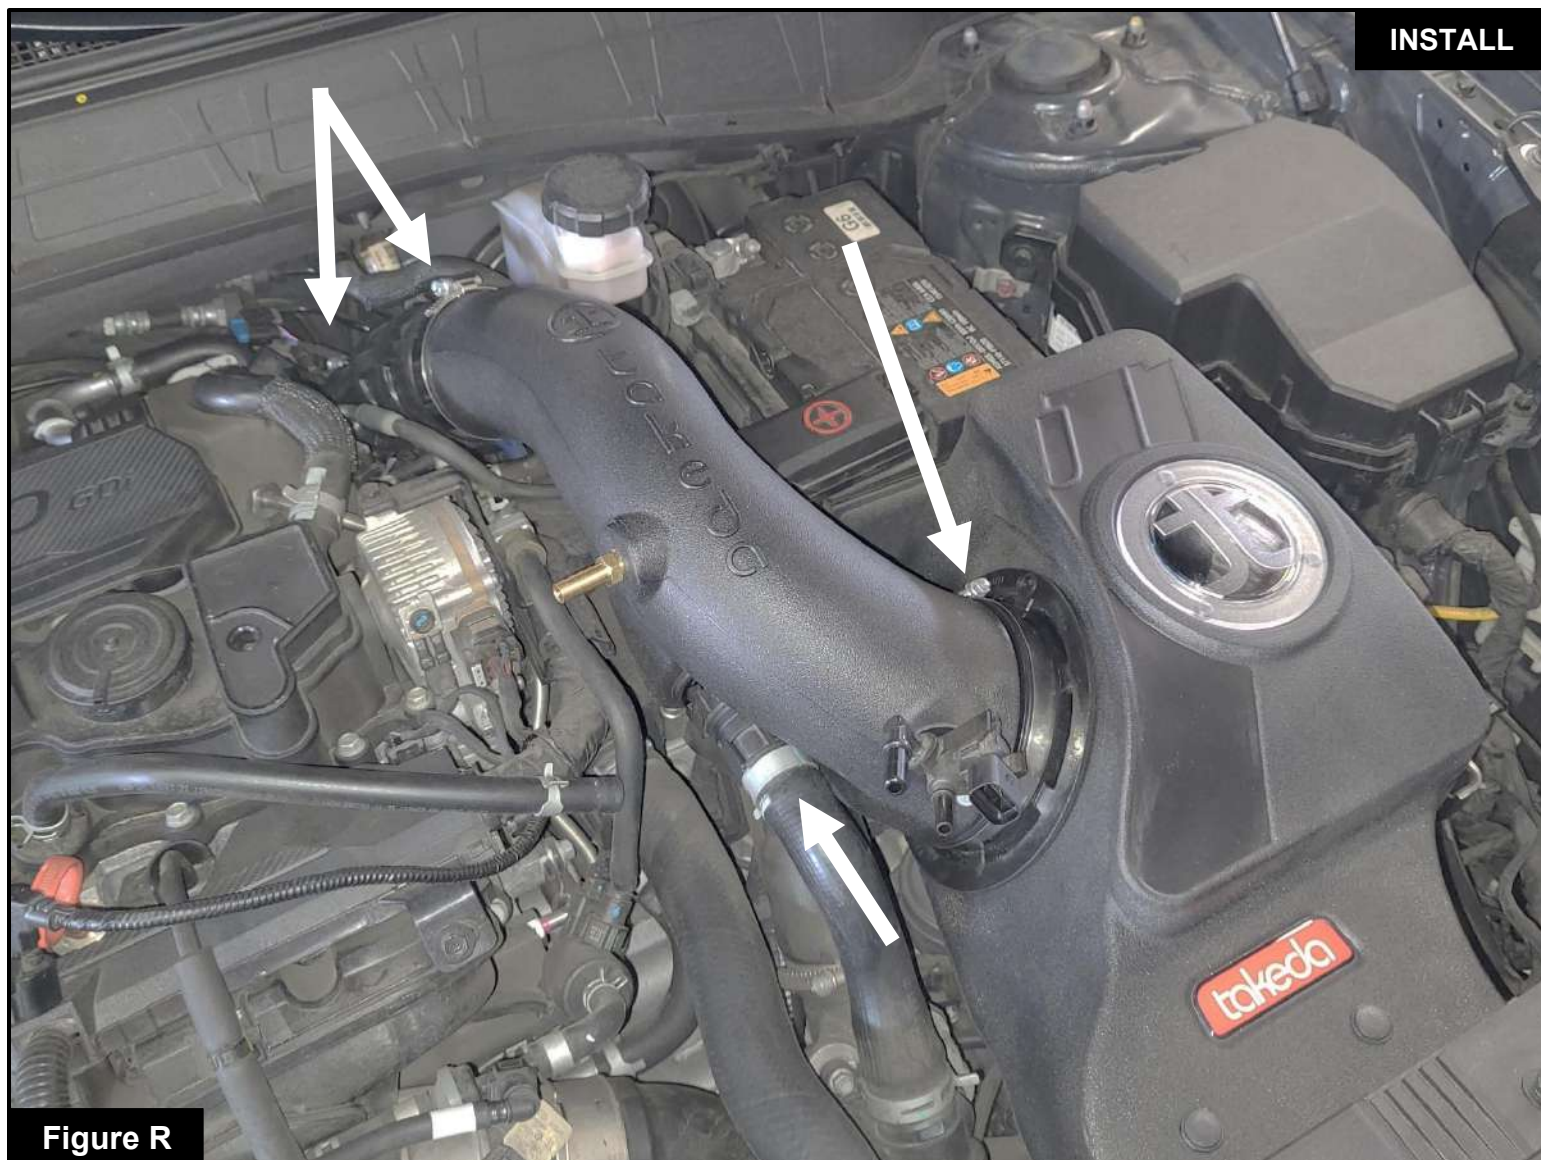

Refer to Figure R for Steps 27-30

Step 28: Install the **aFe POWER** filter and clamp into the **TAKEDA** housing until the locking tabs engage.

Make sure the filter rotates freely. Do not tighten the clamp at this time.

Step 29: Install the **TAKEDA** intake tube by sliding it into the air filter first, then into the silicone coupler. Do not tighten clamp at this time.

Step 30: Push the recirculation hose onto the bottom fitting until it clicks into place. Make sure the hose is not kinked

Step 31: Adjust the coupler and **TAKEDA** tube orientation for best fitment. Use an 8mm driver or socket wrench to tighten all clamps securing the **TAKEDA** intake tube in place.



Figure S

Refer to Figure S for Steps 31-33

Step 32: Connect both quick-connect hoses to the ejector fitting until the side tabs click securely into place.

Step 33: Connect the sensor electrical harness from the ejector fitting.

Step 34: Connect the PCV hose to the **TAKEDA** intake tube.



Figure T

Refer to Figure T for Step 34

Step 35: Install the **TAKEDA** plug. The kit includes an optional plug to close off the auxiliary air inlet.

- Without the plug installed, the **TAKEDA** intake will capture the maximum amount of air available. More airflow can lead to increased power, but some of this air may come from inside the engine compartment and could be warmer, potentially affecting vehicle performance.
- Installing the plug on the housing will block out hot engine air, ensuring that only the coolest air is directed into the engine. This will also help reduce intake noise.



Your installation is now complete. Thank you for choosing TAKEDA USA!

NOTE: Check to ensure that all screws, clamps, and connectors are secure after 100-200 miles.



PAGE LEFT BLANK INTENTIONALLY



PAGE LEFT BLANK INTENTIONALLY



PAGE LEFT BLANK INTENTIONALLY



advanced FLOW engineering, inc.

Corona, CA 92879

<https://afepower.com/contact-us>