

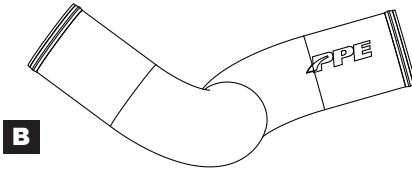


Hot and Cold Side Intercooler Charge Pipe Kit

2019-2025 RAM 6.7L Cummins

(215022000, 215022010, 215022020, 215022030)

Installation Guide



CONTENTS:

- A.** (1) *Hot Side Pipe*
- B.** (1) *Cold Side Pipe*
- C.** (2) *Silicone Coupler, 3.5" To 3.0"*
- D.** (1) *Silicone Coupler, 2.75" To 3.5"*
- E.** (1) *Silicone Coupler, 3.5" To 3.5"L*
- F.** (5) *Spring Clamp, 95-103mm*
- G.** (1) *Spring Clamp, 73-81mm*
- H.** (2) *Spring Clamp, 81-89mm*

DISASSEMBLY:

Step 1. *Vehicle off and cool.
Disconnect both batteries.*

Step 2. *Remove clips securing
the radiator shroud, then
carefully lift it out (**Fig. 1 &
2**).*




Step 3. *Disconnect the wiring
harnesses from both
sensors and remove any
clips securing the air box
lid and scoop (**Fig. 3**).*



- Step 4.** Loosen the hose clamp connecting the intake tube to the air box lid (Fig. 4).



- Step 5.** On the passenger side, remove the reinforcement beam (Fig. 5).

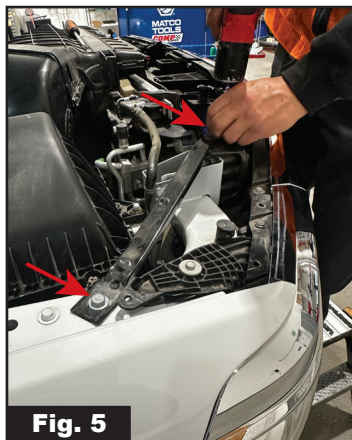

- Step 6.** Loosen the screws on the air box lid then remove the lid and filter (Fig. 6 & 7).





Step 7. Remove the screws securing the air scoop then lift to remove the air box assembly (Fig. 8).




Step 8. Loosen the hose clamp connecting the intake tube to the turbo then remove (Fig. 9).



INSTALLATION

Step 9. On the passenger side, loosen the hose clamp at the turbo and intercooler, then remove the charge pipe through the bottom of the vehicle (**Fig. 10, 11, & 12**).

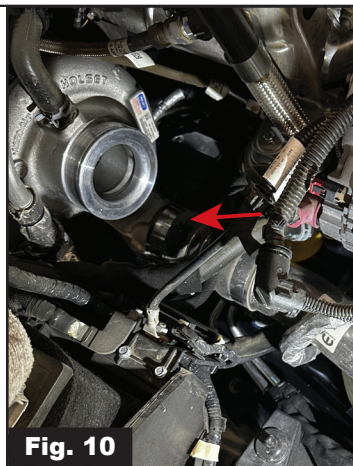

Step 10. *Install Silicone Coupler (D) onto the turbo. Note the orientation of the coupler; the hump should be facing towards the passenger side (Fig. 13). Install Silicone Coupler (C) onto the intercooler (Fig. 14).*



Fig. 13



Fig. 14

Step 11. *Install the Hot Side Pipe (A) into Silicone Coupler (D) first then into Silicone Coupler (C) (Fig 15).*


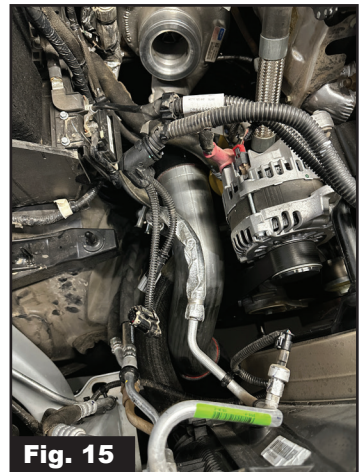


Fig. 15

- Step 12. Install Spring Clamp (G) onto Silicone Coupler (D) on the turbo side and Spring Clamp (F) on the tube side (**Fig. 16**). Make sure the clamp is installed in a position where it does not come into contact with any components.




- Step 13. Install Spring Clamp (H) onto Silicone Coupler (C) on the intercooler side and Spring Clamp (F) on the tube side (**Fig. 17**). Make any adjustments needed to the hot side tube then tighten all spring clamps.

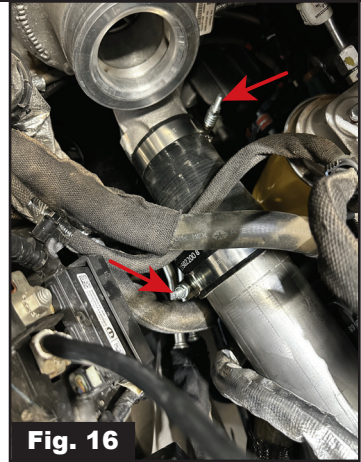

- Step 14. On the driver side, remove the bolt securing the power steering reservoir. Loosen the hose clamp at the throttle body (**Fig. 18**).




- Step 15.** Loosen the hose clamp at the intercooler then rotate the power steering reservoir out of the way and remove the charge pipe through the top (**Fig. 19 & 20**).

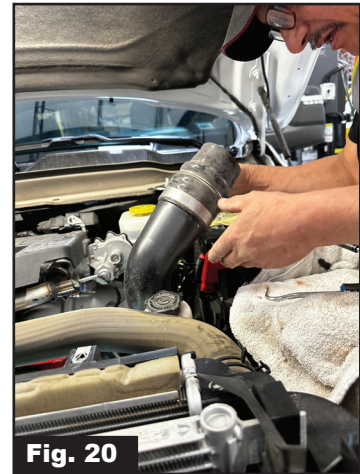

- Step 16.** Install Silicone Coupler (C) onto the intercooler (**Fig. 21**).




Step 17. Install the Cold Side Pipe (B) into Silicone Coupler (D) (Fig. 22).

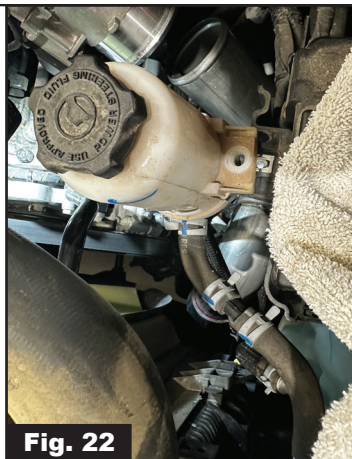

Step 18. Install Silicone Coupler (E) onto the throttle body and Cold Side Pipe (B) (Fig. 23).




Step 19. Install two Spring Clamps (F) onto Silicone Coupler (E) (Fig. 24).

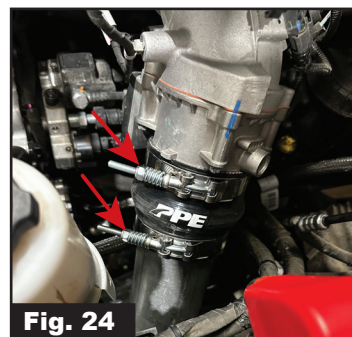

Step 20. Install Spring Clamp (F) on the tube side and Spring Clamp (H) on the intercooler side. Make any adjustments needed to the cold side pipe then tighten all hose clamps (Fig. 25).

Step 21. Reinstall all necessary factory components and electrical connections.

Installation complete.

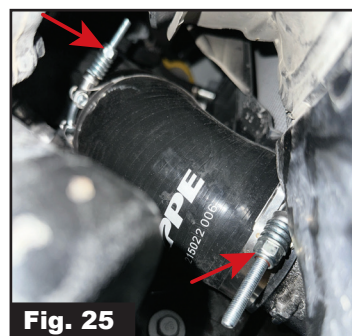

DISCLAIMER OF LIABILITY

Performance products can increase horsepower above and beyond factory specifications. Additional horsepower creates more stress on the drive-train components, which could result in drive-train failure.

Note regarding emissions-related, non-E.O.-legal products: THESE PRODUCTS ARE LEGAL IN CALIFORNIA ONLY FOR RACING VEHICLES THAT MAY NEVER BE USED, OR REGISTERED OR LICENSED FOR HIGHWAY OR OFF-ROAD USE.

This agreement sets forth the terms and conditions for the use of PPE products. The installation of this product indicates that the Buyer has read and understands this agreement and accepts the terms and conditions. PPE (Pacific Performance Engineering) Inc., its distributors, employees, and dealers (the "Seller") shall not be responsible for the product's proper use and service. The buyer hereby waives all liability claims. The Buyer hereby acknowledges no reliance on the Seller's skill or judgment to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof, and the Buyer hereby waives all remedies or liabilities expressed or implied, arising by law or otherwise (including without any obligation of the Seller with respect to fitness, merchantability and consequential damages), or whether or not occasioned by the Seller's negligence. The Seller disclaims any warranty and expressly disclaims any liability for personal injury or damages. The Buyer acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the Buyer agrees to indemnify the Seller and to hold the Seller harmless from any claim related to the item of equipment purchased. Under no circumstances will the Seller be liable for any damages or expenses by reason of use or sale of any such equipment. The Seller assumes no liability regarding the improper installation or misapplication of its products. It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer. The Buyer is solely responsible for all warranty issues from the manufacturer.

LIMITATION OF WARRANTY

The Seller gives Limited Warranty as to description, quality, merchantability, and fitness for a particular purpose, productiveness, or any other matter of Seller's product sold herewith. The Seller shall not be responsible for the products proper use and service and the Buyer hereby waives all rights other than those expressly written herein. This warranty shall not be extended, altered or varied except by a written instrument signed by Seller and Buyer. The Warranty on PPE Manifolds and Up-Pipes Kits, OEM-Length Up-Pipes is three (3) years, a limited lifetime warranty on PPE cast aluminum pans and covers, and a limited lifetime warranty on PPE Transmission Coolers and one (1) year limited warranty on all other PPE products from the date of sale to original buyer and limited solely to the parts contained within the products kit. All products that are in question of Warranty must be returned prepaid to the Seller and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Seller. Under no circumstances will the Seller be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or re-installation - of this product or any other contingent expenses. Under no circumstances will the Seller be liable for any damage or expenses incurred by reason of the use or sale of any such equipment. In the event that the buyer does not agree with this agreement: the buyer may promptly return this product, in a new and unused condition in its original packaging, with a dated proof of purchase to the place of purchase within ten (10) days from date of purchase for a full refund. The installation of this product indicates that the buyer has read and understands this agreement and accepts its terms and conditions.

⚠ CA WARNING: Handling passenger or off-highway motor vehicle parts can expose you to chemicals such as phthalates and lead, which can cause cancer and reproductive harm. To minimize exposure, service the vehicle in a well-ventilated area, wear gloves, and wash your hands. For more information see www.P65Warnings.ca.gov/motor-vehicle-parts.

